

Hall Effect Switch IC with Complementary Output

Features

- Operates from 2.4 V to 24 V supply voltage
- Operates with magnetic fields from DC to 15 kHz
- On-chip Hall Sensor
- On-chip temperature compensation circuitry minimizes shifts in on and off points and hysteresis over temperature and supply voltage

Functional Description

The WSH1230 integrates a Hall sensor with complementary dual-output drivers on a single chip. When the front side detects a south-pole magnetic field (S), Output 1 switches from high to low, while Output 2 simultaneously switches from low to high. When a north-pole magnetic field (N) is detected, the outputs revert to their original states. This symmetrical output behavior makes the device ideal for speed sensing, revolution counting, positioning, and brushless DC motor (BLDC) applications.

The device incorporates a temperature-compensated voltage regulator, a differential amplifier, a hysteresis controller, and two open-collector output drivers capable of sinking up to 20 mA. An on-chip protection resistor safeguards against reverse power connection.


Its temperature-dependent bias increases the supply voltage to the Hall elements and adjusts the switching thresholds to compensate for the reduced magnetic induction at elevated temperatures. As a result, the sensor maintains precise switching points across the full operating temperature range of -40°C to $+125^{\circ}\text{C}$ and supports supply voltages from 2.4 V to 24 V.

Pin Definition

Name	P / I / O	Pin# (TO-94)	Pin# (SOT-25)	Description
Vdd	P	1	4	Positive Power Supply
Vout1	O	2	5	Output Pin 1
Vout2	O	3	3	Output Pin 2
Gnd	P	4	2	Ground
NC	-	-	1	NC

Winson reserves the right to make changes to improve reliability or manufacturability.

Absolute Maximum Rating (at $T_a = 25^\circ\text{C}$)

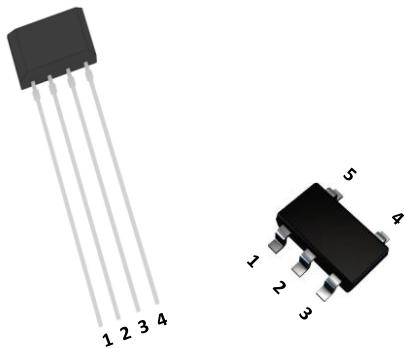


Supply Voltage, V_{dd}	-----	26V
Output Breakdown Voltage, $V_{out}(\text{breakdown})$	-----	26V
Magnetic Flux Density, B	-----	Unlimited
Reverse Protection Voltage, V_r	-----	-0.5V
Output ON Sink	-----	20mA
Operating Temperature Range, T_a	-----	-40°C to +125°C
Storage Temperature Range, T_s	-----	-65°C to +150°C
Power Dissipation, P_d		
TO-94	-----	500mW
SOT-25	-----	350mW

Electrical Characteristics $(T_a = +25^\circ\text{C}, V_{cc} = 2.4 \text{ to } 24\text{V})$

Characteristic	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Supply Voltage	V_{cc}	—	2.4	—	24	V
Output Saturation Voltage	$V_{out}(\text{sat})$	$V_{cc}=12\text{V}, I_c=10\text{mA}, B>B_{op}$	—	0.2	0.6	V
Output Leakage Current	$I_{leakage}$	$V_{cc}=12\text{V}, B<B_{rp}$	—	< 0.1	10	μA
Supply Current	I_{supply}	$V_{cc}=12\text{V}, \text{Output Open}$	—	2.0	5	mA
Output Rise Time	T_r	$V_{cc}=12\text{V}, RL=2\text{k}\Omega, CL=20\text{pf}$	—	1.0	10	μs
Output Falling Time	T_f	$V_{cc}=12\text{V}, RL=2\text{k}\Omega, CL=20\text{pf}$	—	0.3	1.5	μs

Function Block

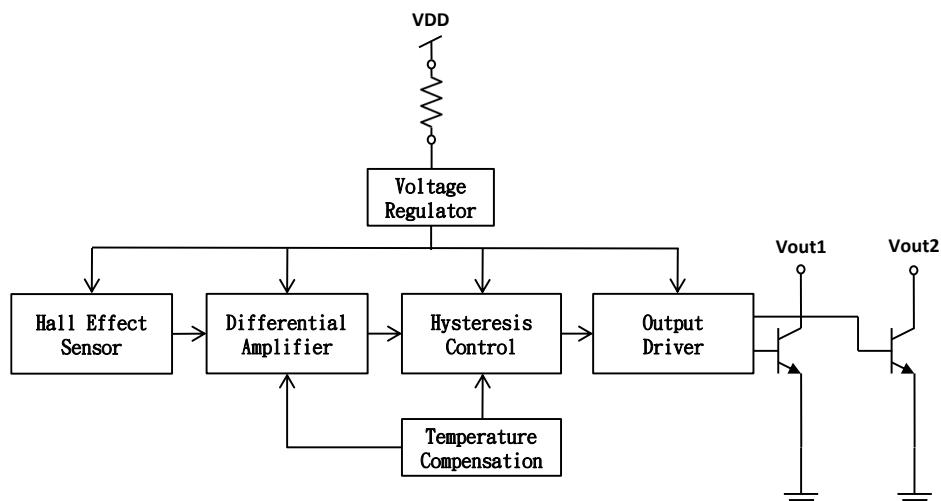

Winson reserves the right to make changes to improve reliability or manufacturability.

Magnetic Characteristics

Characteristic	Symbol	Grade	Min.	Typ.	Max.	Unit
Operating Point	Bop	A	+5	+30	+50	Gauss
		B		+50	+70	Gauss
		C			+120	Gauss
Release Point	Brp	A	-50	-30	-5	Gauss
		B	-70	-50		Gauss
		C	-120			Gauss
Hysteresis Window	Bphys			60	100	Gauss


★ "+" means South magnetic field.

★ 1 mT = 10 Gauss

Ordering Information


WSH1230-XPAN <input type="checkbox"/> (TO-94)	Grade
WSH1230-XPDN <input type="checkbox"/> (SOT-25)	
↑ Grade	
Halogen Free	

◆ TO-94 – 1000/bag, SOT-25 – 3000/reel

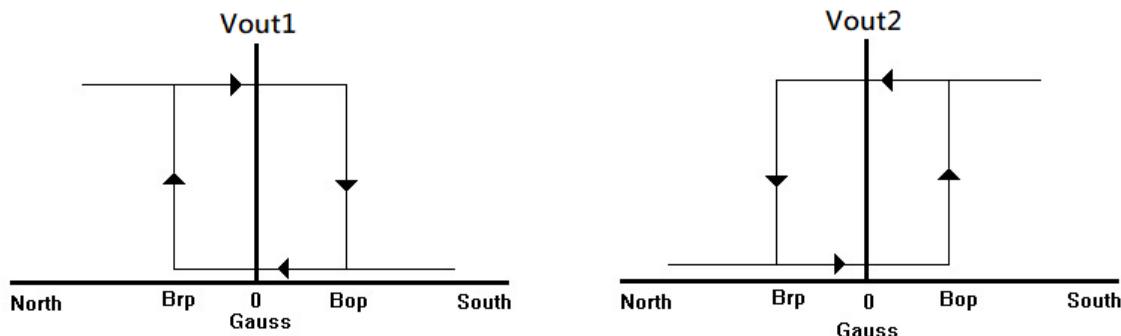


Winson reserves the right to make changes to improve reliability or manufacturability.

Hall Device Sensing Direction



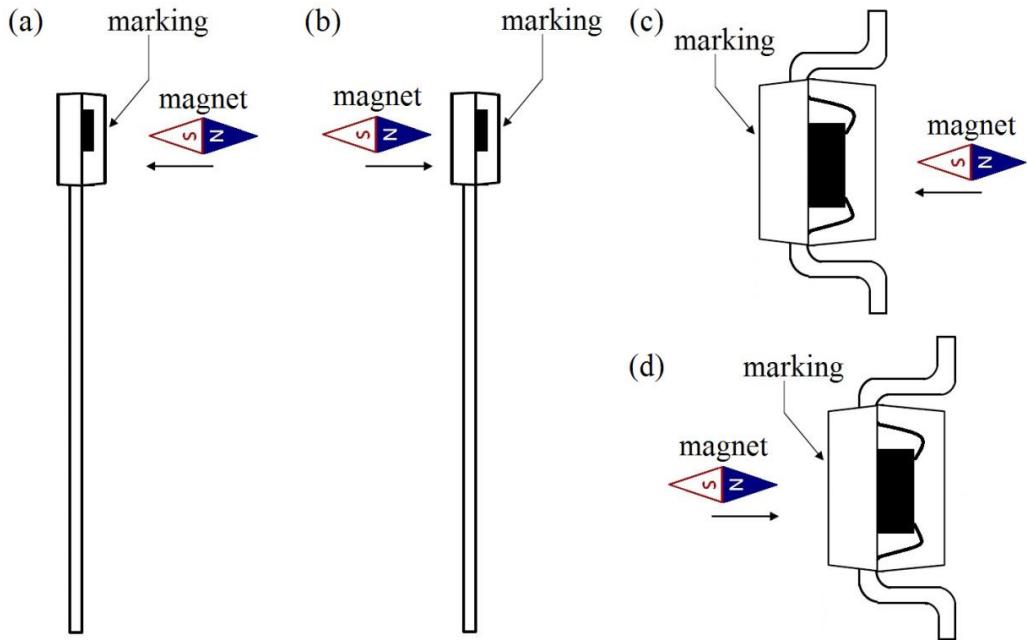


Package Information

《TO-94》

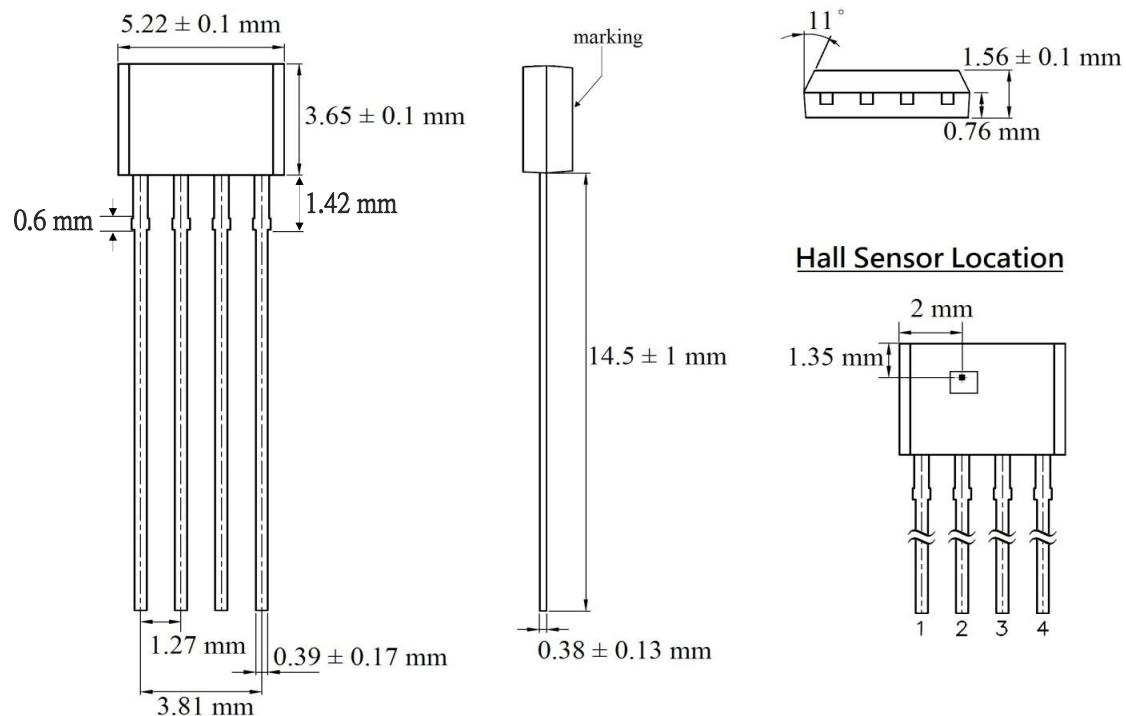

Winson reserves the right to make changes to improve reliability or manufacturability.

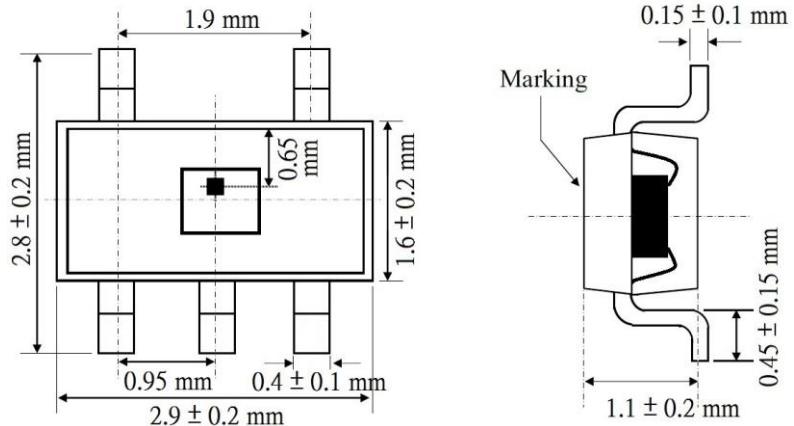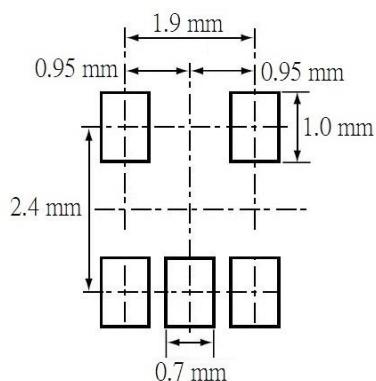
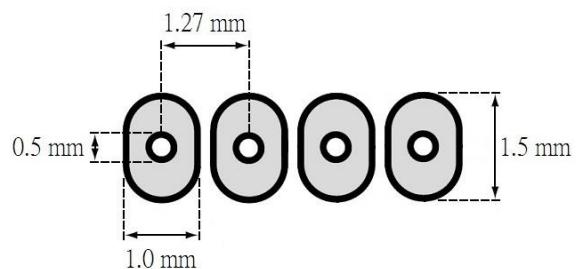
《SOT-25》

PCB Layout Reference View
SOT-25

TO-94


Winson reserves the right to make changes to improve reliability or manufacturability.

Application Circuit: Magnetic field detector

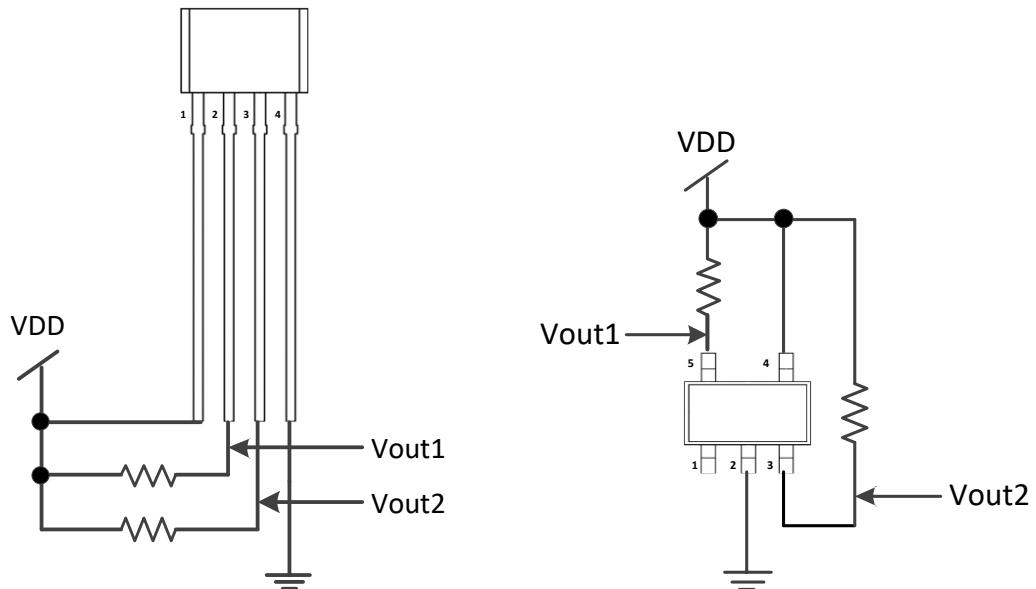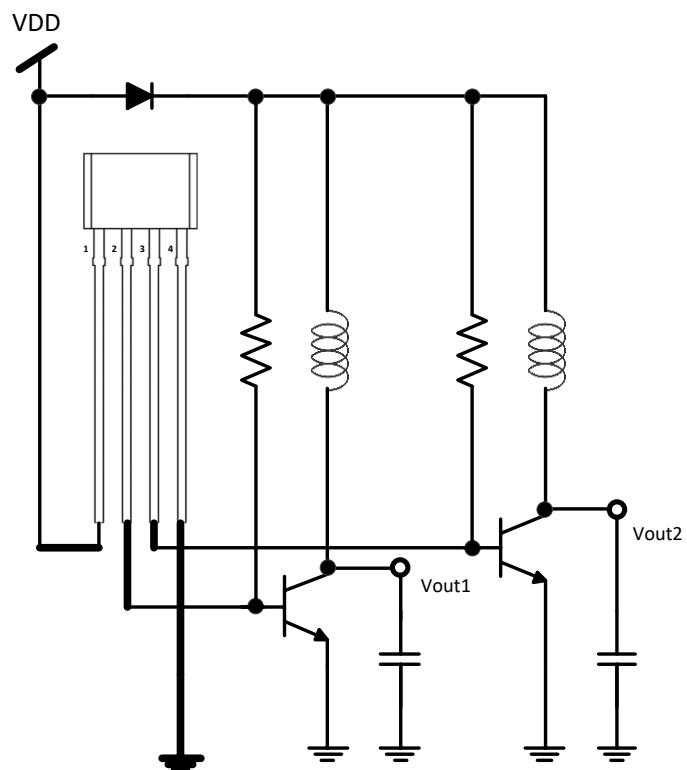
《TO-94》

《SOT-25》


Application Circuit: Fan Motor Applications


Winson reserves the right to make changes to improve reliability or manufacturability.

Application Circuit: Protection circuit

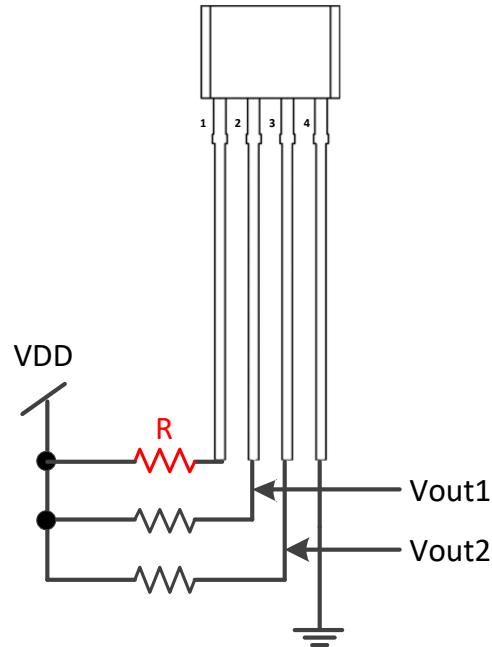

Precautions for the use of Hall Sensor IC: please refer to Winson Website-> Products->Application Note ->Hall Sensor IC Application Note:
<http://www.winson.com.tw/Product/83>

Winson reserves the right to make changes to improve reliability or manufacturability.