

GROUND ROD DAWG™

다시는 사다리에서 접지봉을 박지 마세요



**GROUND SINKER**  
For driving the top  
of ground rod  
below grade

**SDS MAX**  
Connect to  
hammer drill  
for secure  
driving

함마드릴 연결

**BENT HARDENED  
TOOL STEEL**  
Creates an easy  
setup for driving  
ground rod

1/2" & 5/8"

5/8" & 3/4"

3/8" & 1/2"



Model	Description	Specifications
GRD01	Ground Rod Dawg™	5"L x 2-3/4"W x 11-3/4"H, 4 lb.

MADE IN THE  
**USA**  
WITH GLOBAL  
COMPONENTS

**LIFETIME  
Warranty**

**GROUND ROD DAWG™**

몇 초 안에 접지봉을 안전하게 작업하세요



**EC&M**  
**Product of the Year**  
2018 Category Winner

**PATENTED**

iTOOLco의 Ground Rod Dawg™를 사용하면 1분 이내에 1/2인치, 5/8인치, 3/4인치 막대를 지면에서 안전하게 박아 넣을 수 있습니다. 막대가 충분히 깊이 박히면 도구가 지면에서 지표면 아래로 막대를 박아 위에서 끝까지 망치질합니다.

## WE HAD A LARGE DATA CENTER THAT REQUIRED GROUND RODS TO BE DRIVEN ALL AROUND THE BUILDING.

The iTOOLco Ground Rod Dawg was a real time saver and provided safety we never knew existed. We used to drag a ladder around and drive rods from the top. Not anymore! Thanks for another fantastic tool iTOOLco.

**Gordon Gebman**  
Foreman  
Omega Electric



지면에서 막대를 안전하게 박으세요




공구를 함마드릴에 고정하세요



Fits 1/2", 5/8" and 3/4".

GROUND ROD DAWG XL™  
DRIVE LARGE ROD FROM GROUND LEVEL



**1-1/8" HEX SHANK**  
Bit type for demo hammer



**END RECEIVER**  
Drives rod under grade

**HEAVY DUTY STEEL CONSTRUCTION**  
Allows for heavy hits to drive in rod

**TWO VERSIONS AVAILABLE**  
One for up to 3/4" & 1" rod

*\*Sold as shown*



MADE IN THE  
**USA**  
WITH GLOBAL  
COMPONENTS

**LIFETIME**  
Warranty

Model	Description	Specifications
<b>GRDXL34</b>	Ground Rod Dawg XL™ (Up to 3/4")	4"H x 9-1/2"W x 23"L 18 lb.
<b>GRDXL01</b>	Ground Rod Dawg XL™ (Up to 1")	4"H x 9-1/2"W x 23"L 18 lb.



**GROUND ROD DAWG XL™**

지면에 큰 막대를 박아라




사다리 없이 막대 박기

지표면 아래의 막대 꼭대기  
까지 구동Fits in 1-1/8" hex shank  
jack hammer.**PATENTED**

두 가지 모델로 출시된 iTOOLco의 Ground Rod Dawg XL을 사용하면 지면에서 3/4인치 또는 1인치 길이의 지면봉을 안전하게 박을 수 있습니다. Ground Rod Dawg XL을 사용하면 사다리를 오르거나 쇠파스를 사용하여 지면 아래에 큰 지면봉을 박을 필요가 없습니다.

Ground Rod Dawg XL을 육각형 생크 잭 해머에 끼기만 하면 됩니다. 그런 다음로드의 아랫부분을 Ground Rod Dawg XL에 끼우면 됩니다. 독특한 디자인 덕분에 Ground Rod Dawg XL이 로드와 밀착되어 사용자가 쉽게 박을 수 있습니다. 막대를 충분히 깊이 박아 넣은 후 막대 위쪽에 있는 리시버를 사용하여 최종 경사면까지 박아 넣습니다.

**STRUT DRIVER™**  
DRIVE STRUT UNDER GRADE FROM GROUND LEVEL

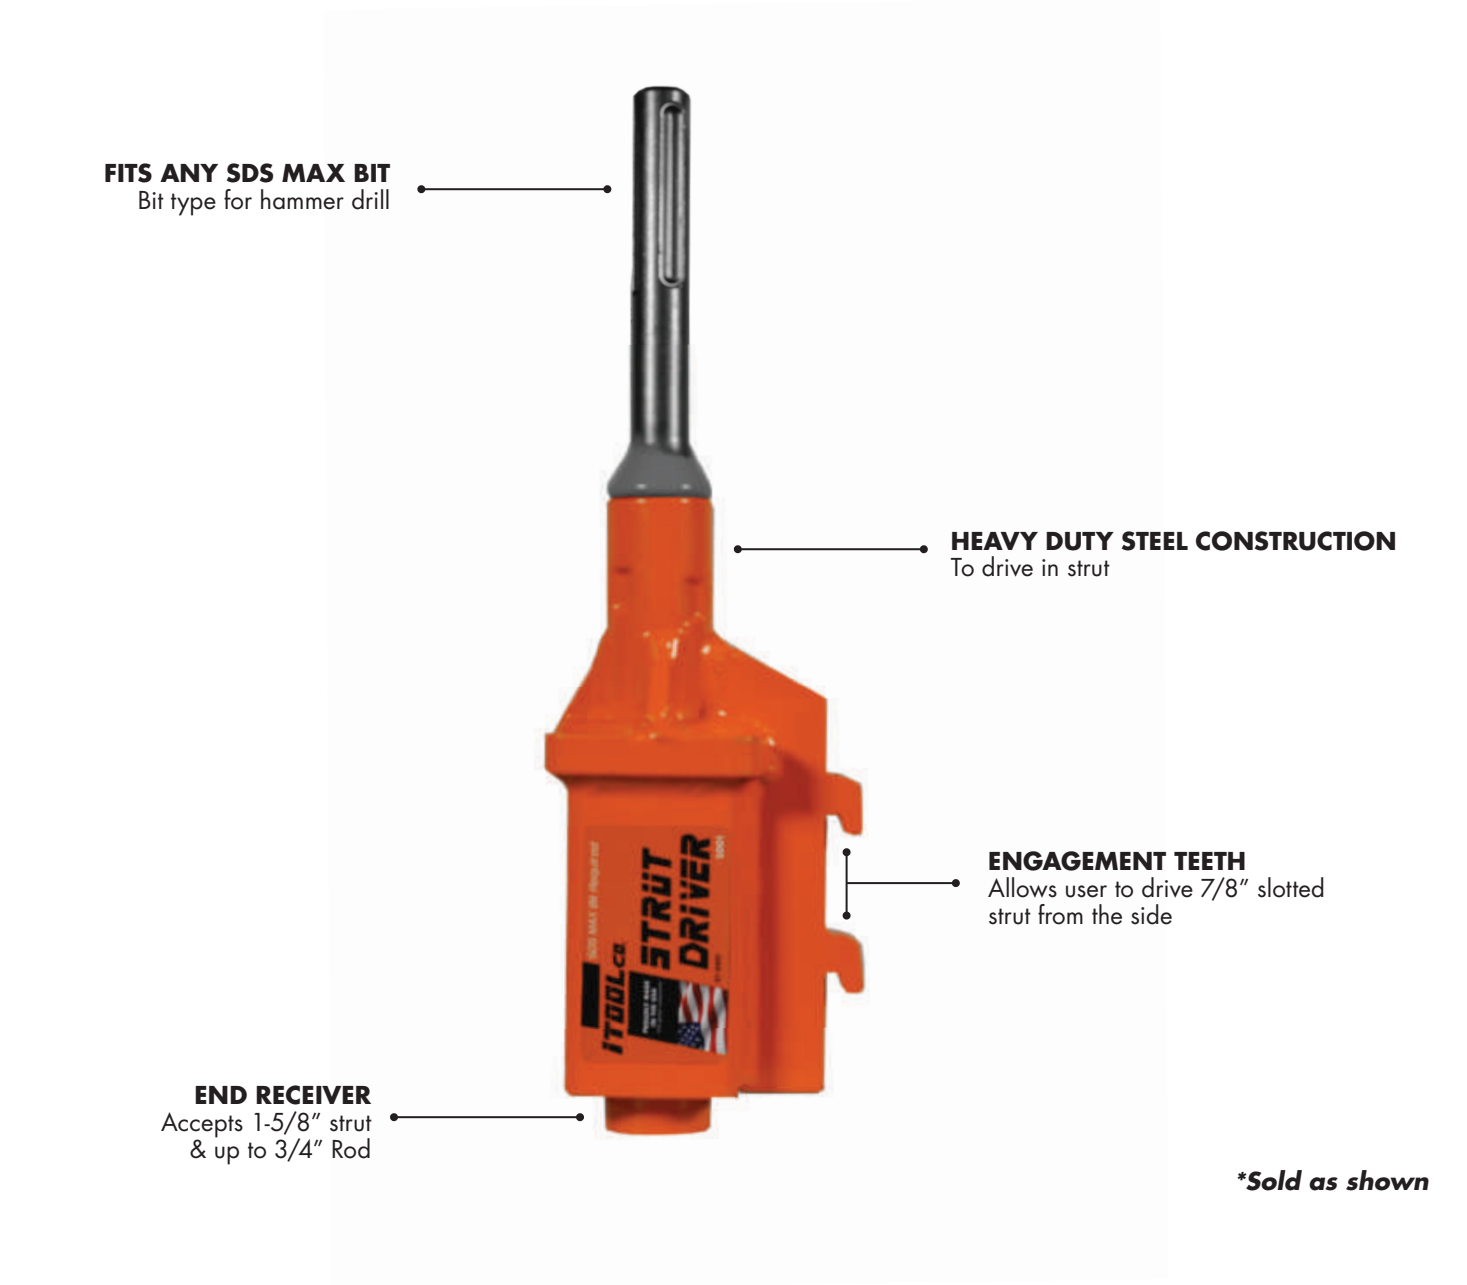

Model	Description	Specifications
SD01	Strut Driver™	4"H x 9-1/2"W x 23"L "

MADE IN THE  
**USA**  
WITH GLOBAL  
COMPONENTS

**LIFETIME**  
Warranty

**STRUT DRIVER™****DRIVE STRUT UNDER GRADE FROM GROUND LEVEL**

**Engagement teeth to drive strut from the side.**



**End receiver accepts 1-5/8" strut.**

**PATENT PENDING**

iTOOLco의 스트럿 드라이버를 사용하여 지면에서 스트럿을 안전하게 박아 넣으세요. 스트럿 드라이버를 사용하면 사다리를 오르거나 망치를 사용하여 스트럿을 지면에 박을 필요가 없습니다. 두 발을 지면에 딛고 스트럿 드라이버를 SDS MAX 해머 드릴에 꽂으세요. 해머 드릴이 해머 모드로 설정되어 있는지 확인하고 박아 넣으세요. 고유한 맞물림 톱니 덕분에 측면에서 1/2인치부터 1-5/8인치까지 다양한 크기의 스트럿을 박아 넣을 수 있습니다. 맞물림 톱니를 스트럿에 삽입한 후 박아 넣으세요. 스트럿이 충분히 박아지면 스트럿 상단으로 이동하여 최종 경사면까지 박아 넣으세요.

참고사항: 엔드 리시버는 1-5/8" 크기의 스트럿과 최대 3/4" 크기의 막대를 수용하도록 설계되었습니다.

다른 크기의 암석을 지표면 아래로 가라앉히려면 결합 이빨을 사용할 수 있습니다.

\*전기 제품 및 솔루션 최고 제품 2022년 수상.



**End receiver for driving from the top.**