



Surge protector

SPT20-DC




DIN rail mounting

Mode of Protection: (DC+/-) - PE, (DC-/+) - PE

Housing Pluggable Design

Compliance IEC/EN 61643-41

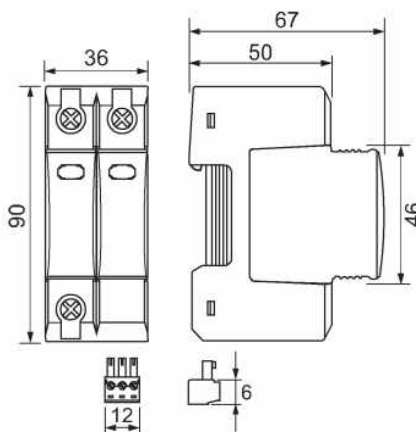

Electrical Characteristics

Rated operating voltage Un 정격작동전압Un	12V	24V
Maximum operating voltage Uc 최대사용전압	24V	38V
Nominal discharge current In (8/20us) 공칭방전전류 In (8/20us)	10kA	
Surge current capacity I _{max} 서지용량	20kA	
Protection voltage Up (8/20us) 보호전압	250V	
Response time 응답시간	< 25 ns	
Degrees of protection 케이스보호등급	IP20	
Test standard 테스트기준	IEC/EN 61643-41	
Working temperature range 작동온도범위	(-40 °C~+70 °C)	
Dimension 제품크기	90.16(L) x 12.4(W) x 76(H) mm	