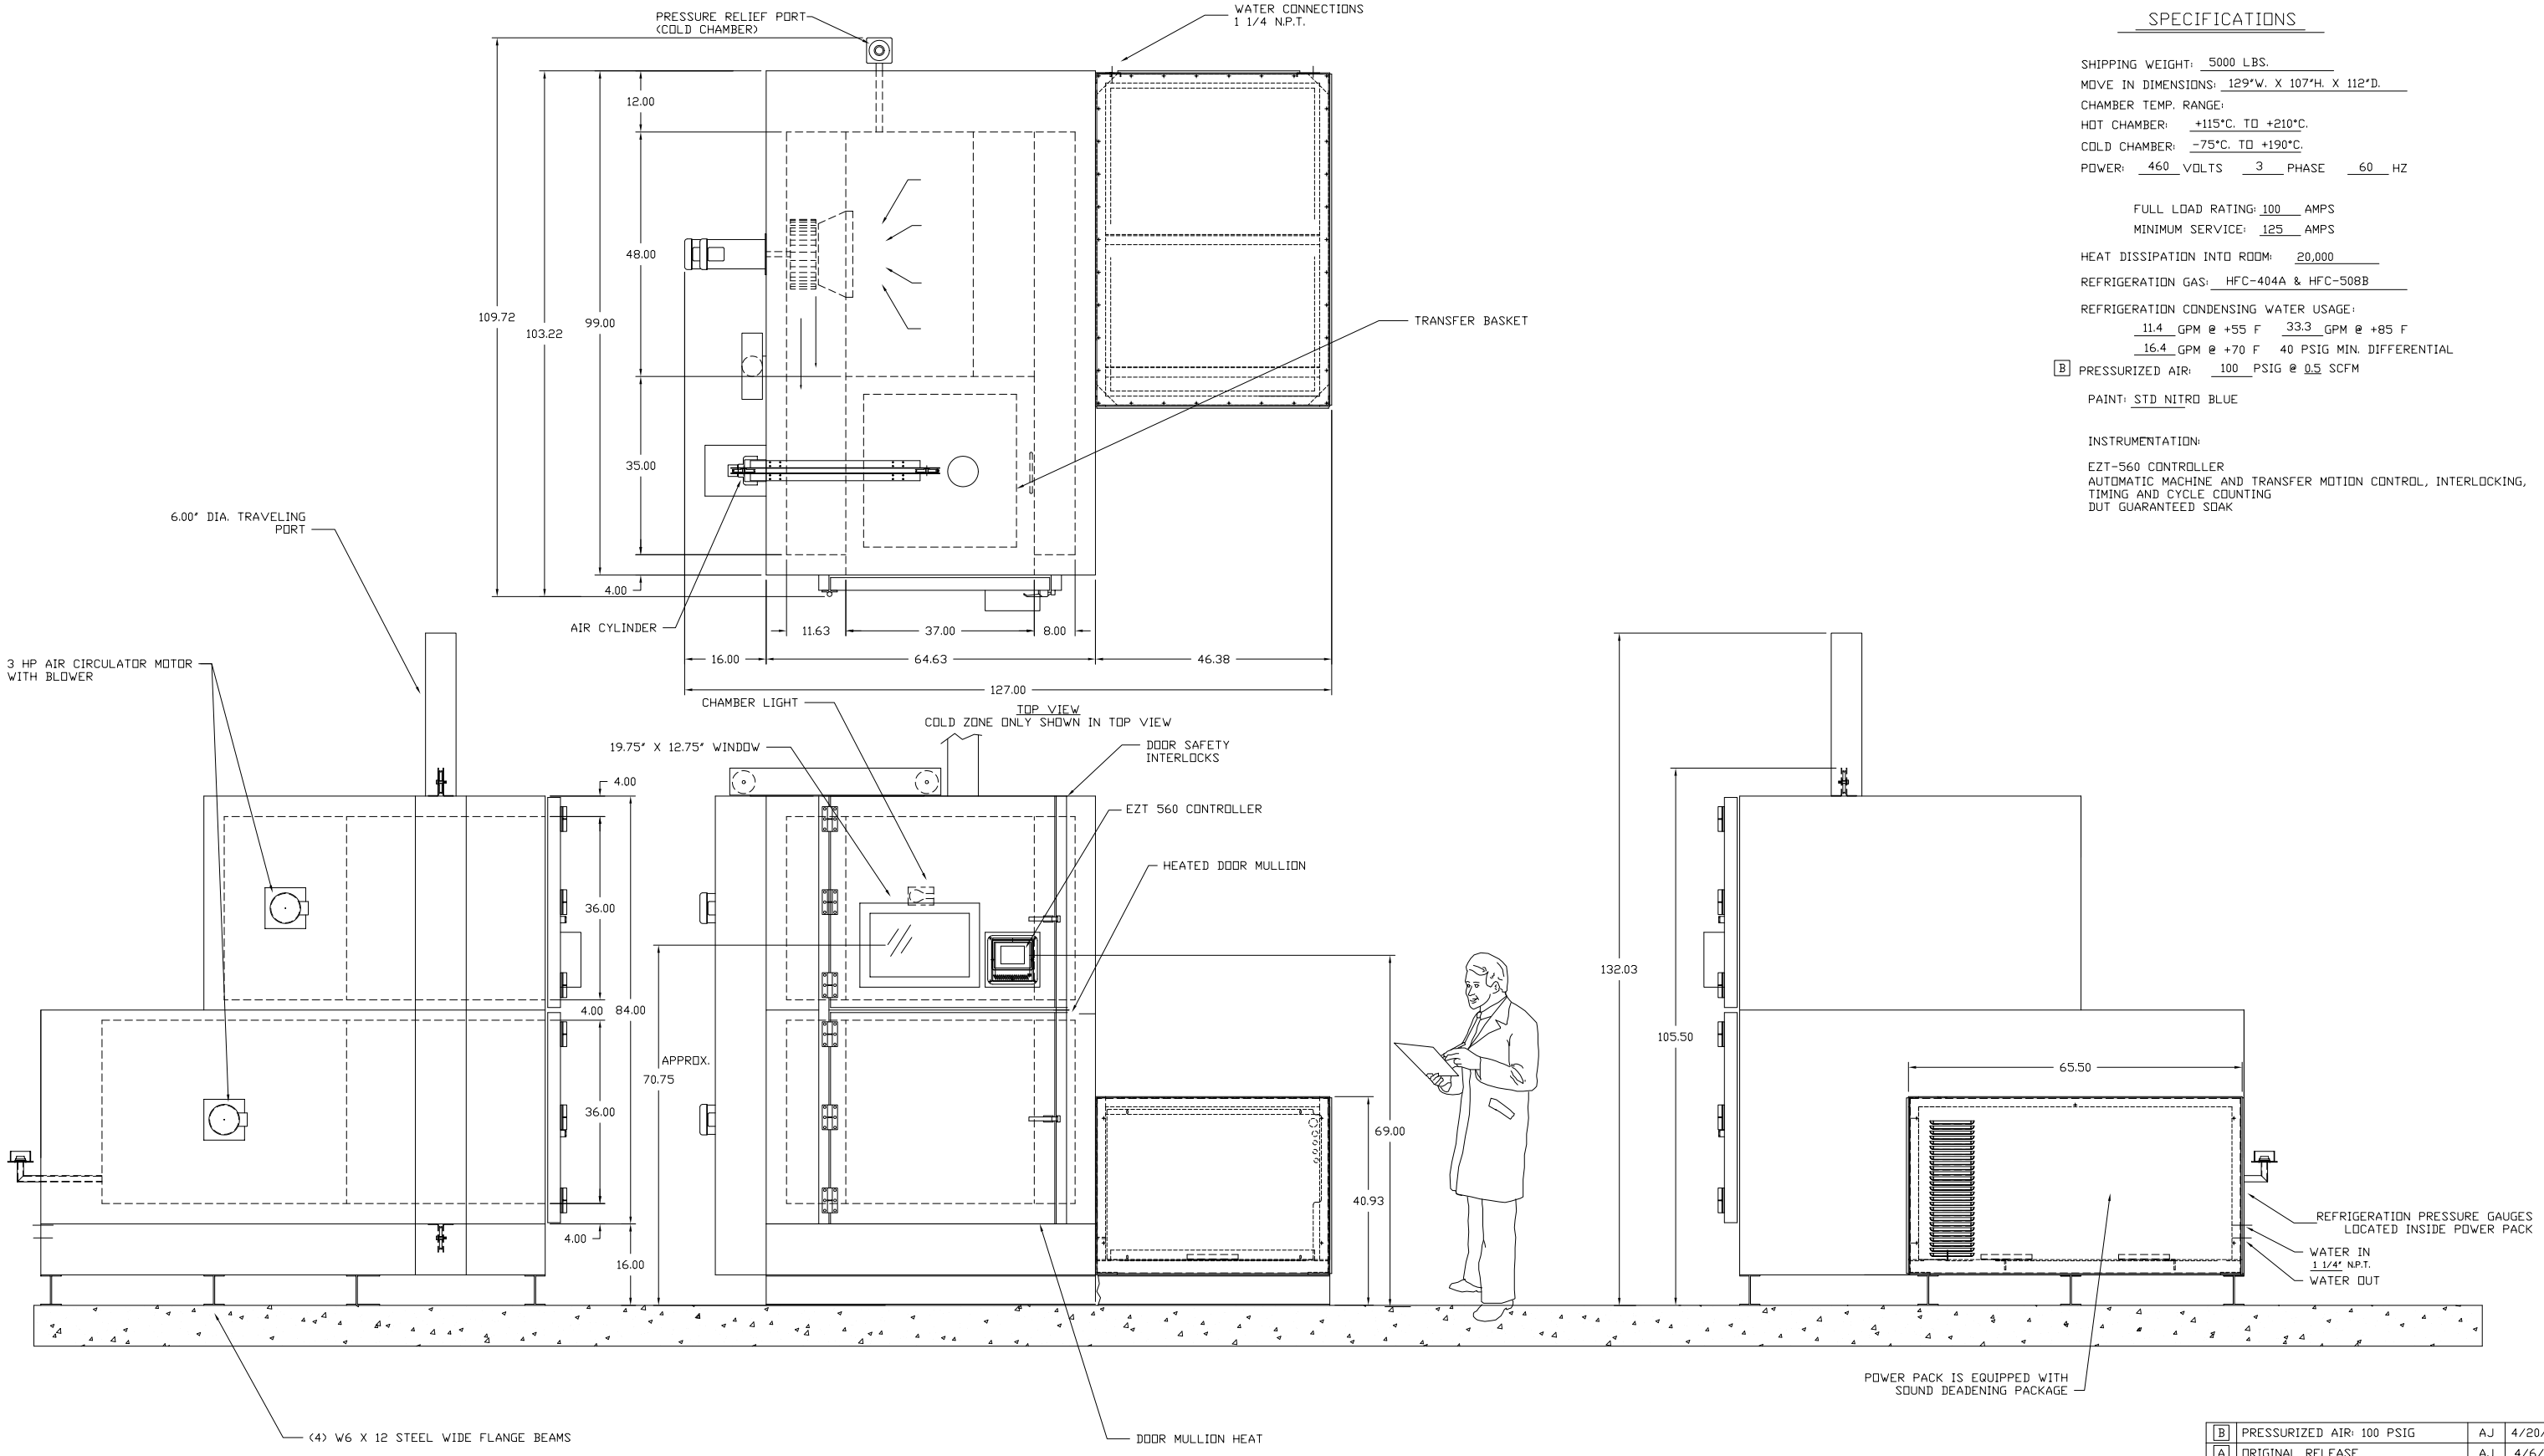

SPECIFICATIONS

SHIPPING WEIGHT: 5000 LBS.
MOVE IN DIMENSIONS: 129"W. X 107"H. X 112"D.
CHAMBER TEMP. RANGE:
HOT CHAMBER: +115°C. TO +210°C.
COLD CHAMBER: -75°C. TO +190°C.
POWER: 460 VOLTS 3 PHASE 60 HZ

FULL LOAD RATING: 100 AMPS
MINIMUM SERVICE: 125 AMPS

HEAT DISSIPATION INTO ROOM: 20,000
REFRIGERATION GAS: HFC-404A & HFC-508B
REFRIGERATION CONDENSING WATER USAGE:
11.4 GPM @ +55 F 33.3 GPM @ +85 F
16.4 GPM @ +70 F 40 PSIG MIN. DIFFERENTIAL
B PRESSURIZED AIR: 100 PSIG @ 0.5 SCFM

PAINT: STD NITRO BLUE

INSTRUMENTATION:

EZT-560 CONTROLLER
AUTOMATIC MACHINE AND TRANSFER MOTION CONTROL, INTERLOCKING, TIMING AND CYCLE COUNTING
DUT GUARANTEED SOAK

SYM	REVISION	WHO	DATE
B	PRESSURIZED AIR: 100 PSIG	AJ	4/20/07
A	ORIGINAL RELEASE	AJ	4/6/07

Cincinnati Sub-Zero
Cincinnati Sub-Zero Products, Inc.
12011 Mosteller Road
Cincinnati, Ohio 45241
Phone: 513-772-8810
Fax: 513-772-9119
E-Mail: cszinc@cszinc.com

THIS DRAWING HAS BEEN PREPARED BY AND IS THE SOLE OWNERSHIP OF CINCINNATI SUB-ZERO PRODUCTS. COPIES OR REPRODUCTIONS BY CONCEPT OR INTACT IN WHOLE OR IN PART ARE PROHIBITED WITHOUT THE EXPRESS CONSENT OF CINCINNATI SUB-ZERO PRODUCTS

GENERAL TOLERANCES UNLESS OTHERWISE NOTED
1) HOLE SIZES ..... -0.005
2) BEND ..... ±2°
3) DIST. OVER BENDS, 48" ..... ±1/32"
4) DIST. OVER BENDS, 24-48" ..... ±1/16"
5) DIST. OVER BENDS, 0-24" ..... ±1/32"
6) DIST. BETWEEN HOLES AND/OR EDGES WITH NO BENDS, 48" ..... ±0.010"
7) DIST. BETWEEN HOLES AND/OR EDGES WITH NO BENDS, 0"- ..... ±1/32"
8) FRACTIONAL GENERAL 90"+ ..... ±1/16"

DESCRIPTION	HITACHI CABLE INDIANA, INC.
SCALE	1/16
JOB NO.	07-VT14569
I.D. NO.	
DRAWN BY	AJ 4/6/07
MODEL NO.	VTS-16-15-15-SC/WC
CHECKED BY	
APPROVED BY	
DRAWING NO.	14569-CL00 REV. B
PAGE	1/1
SIZE	D