


Proportional pressure relief valve with linear curve (LvdT AC/AC)

RE 29152/07.05

1/10

Type DBETFX

Nominal size 6
 Unit series 1X
 Maximum working pressure P 315 bar, T 200 bar
 Nominal flow rate Q_{nom} 1 l/min

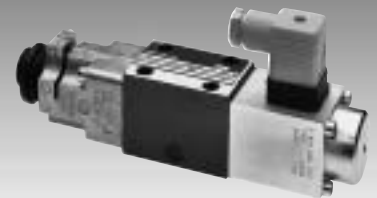

List of contents

Contents	Page
Features	1
Ordering data	2
Preferred types, symbol	2
Function, sectional diagram	3
Technical data	4
External trigger electronics	5 to 8
Characteristic curve	9
Unit dimensions	10

Features

- Directly operated valves with position feedback for limiting system pressure
- Adjustable through the set position (force) of the cone against the main spring (see Basic principle, page 3)
- Position-controlled, linear curve with minimal hysteresis < 1 %, see Technical data
- Pressure limitation to a safe level even with faulty electronics (solenoid current $I > I_{\text{max}}$)
- For subplate attachment, mounting hole configuration to ISO 4401-03-02-0-94
Subplates as per catalog sheet RE 45053 (order separately)
- Plug-in connector for solenoid to DIN 43650-AM2 and plug-in connector for position transducer, included in scope of delivery
- Data for the external trigger electronics
 - $U_B = 24 V_{\text{nom}}$ DC
 - Adjustment of valve curve N_p and gain with and without ramp generator
 - Europe card format, setpoint 0...+10 V (order separately)

Ordering data

DBETFX

X - 1X/

G24- 27

N

Z4

M

*

Proportional pressure relief valve with linear curve and inductive position transducer on the cone

Mounting hole configuration to ISO 4401-03-02-0-94

Unit series 10 to 19 (10 to 19: installation and connection dimensions unchanged)

Max. pressure stage

up to 80 bar

up to 180 bar

up to 250 bar

up to 315 bar

Voltage supply of trigger electronics 24 V DC

= X

= 1X

= 80

= 180

= 250

= 315

= G24

Further information in plain text

M =

NBR seals, suitable for mineral oils (HL, HLP) to DIN 51524

Z4 =

Electrical connection

Unit plug to DIN 43650-AM2

Plug-in connector included in scope of delivery

N =

Manual auxiliary override

Solenoid type (current)


Solenoid current 2.7 A max.

Preferred types

Type	Material Number
DBETFX-1X/80G24-27NZ4M	0 811 402 023
DBETFX-1X/180G24-27NZ4M	0 811 402 022
DBETFX-1X/250G24-27NZ4M	0 811 402 021
DBETFX-1X/315G24-27NZ4M	0 811 402 020

Symbol

For external trigger electronics



Function, sectional diagram

General


Type DBETFX proportional pressure relief valves have position feedback and are used to limit system pressure. The position of the valve cone is measured by the LvdT AC/AC position transducer, and the position of the cone-solenoid position is controlled by external trigger electronics, resulting in a linear curve.

Basic principle


To adjust the system pressure, a setpoint is set in the trigger electronics. Based on this setpoint, the electronics control the position of the armature on the conical seat and of the spring. The position transducer is situated on the cone. The position control ensures extremely low hysteresis. The magnetic force determines the spring force until a new position is reached.

Pressure limitation for maximum safety

If a fault occurs in the electronics, so that the solenoid current (I_{max}) would exceed its specified level in an uncontrolled manner, the pressure cannot rise above the level determined by the maximum spring force.

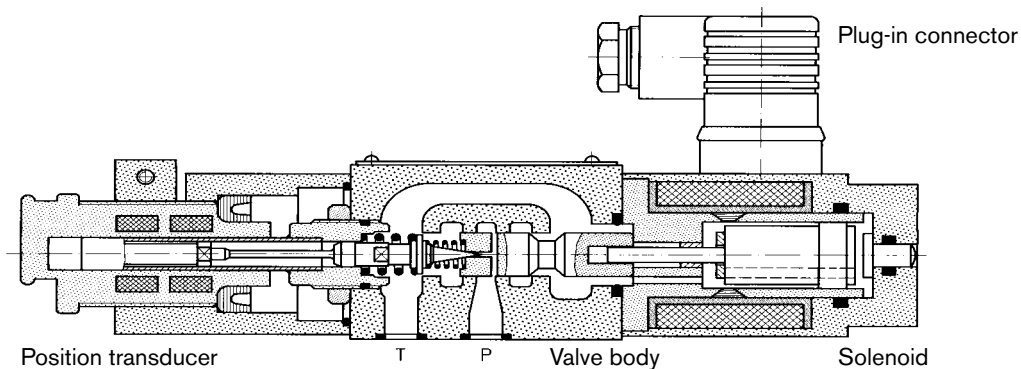

Accessories

Type			Material Number
(4 x)  ISO 4762-M5x30-10.9	Cheese-head bolts		2 910 151 166
Europe card 	VT-VRPA1-527-10/V0	RE 30052	0 811 405 095
Europe card 	VT-VRPA1-527-10/V0/RTP	RE 30054	0 811 405 100
Europe card 	VT-VRPA1-527-10/V0/RTS	RE 30056	0 811 405 175
Plug-in connectors 	Plug-in connector 2P+PE (M16x1.5) for the solenoid and plug-in connector for the position transducer, included in scope of delivery, see also RE 08008.		

Testing and service equipment

Test box type VT-PE-TB1, see RE 30063
Test adapter for Europe cards type VT-PA-3, see RE 30070

Technical data

General		
Construction	Poppet valve	
Actuation	Proportional solenoid with position control and external amplifier	
Connection type	Subplate, mounting hole configuration NG6 (ISO 4401-03-02-0-94)	
Mounting position	Horizontal, vertical with solenoid at top	
Ambient temperature range	°C	-20...+50
Weight	kg	2.3
Vibration resistance, test condition	Max. 25 g, shaken in 3 dimensions (24 h)	

Hydraulic (measured with HLP 46, $\vartheta_{oil} = 40^\circ\text{C} \pm 5^\circ\text{C}$)

Pressure fluid			Hydraulic oil to DIN 51524...535, other fluids after prior consultation			
Viscosity range	recommended	mm ² /s	20...100			
	max. permitted	mm ² /s	10...800			
Pressure fluid temperature range		°C	−20...+80			
Maximum permitted degree of contamination of pressure fluid Purity class to ISO 4406 (c)			Class 18/16/13 ¹⁾			
Direction of flow			See symbol			
Max. set pressure (at Q = 1 l/min)	bar	80	180	250	315	
Minimum pressure (at Q = 1 l/min)	bar	3	4	5	6	
		Note: At Q _{max} = 3 l/min the pressure levels stated here increase				
Max. mechanical pressure limitation level, bar e.g. when solenoid current I > I _{max}	bar	<85	<186	<258	<325	
Max. working pressure (at Q = 1 l/min)	bar	Port P: 315				
Max. pressure	bar	Port T: 200				

Electrical

Cyclic duration factor	%	100
Degree of protection	IP 65 to DIN 40050 and IEC 14434/5	
Solenoid connection	Unit plug DIN 43650/ISO 4400, M16 x 1.5 (2P+PE)	
Position transducer connection	Special plug	
Max. solenoid current	I_{max}	2.7
Coil resistance R_{20}	Ω	3
Max. power consumption at 100 % load and operating temperature	VA	35


Static/Dynamic²⁾

Hysteresis	%	≤ 1
Range of inversion	%	≤ 0.8
Manufacturing tolerance for Q_{max}	%	≤ 2
Response time 100 % signal change	ms	On < 45 / Off < 25

¹⁾ The purity classes stated for the components must be complied with in hydraulic systems. Effective filtration prevents problems and also extends the service life of components.
For a selection of filters, see catalog sheets RE 50070, RE 50076 and RE 50081.


²⁾ All characteristic values ascertained using amplifier 0 811 405 095 for the position-controlled 2.7 A solenoid.


Circuit diagram/pin assignment

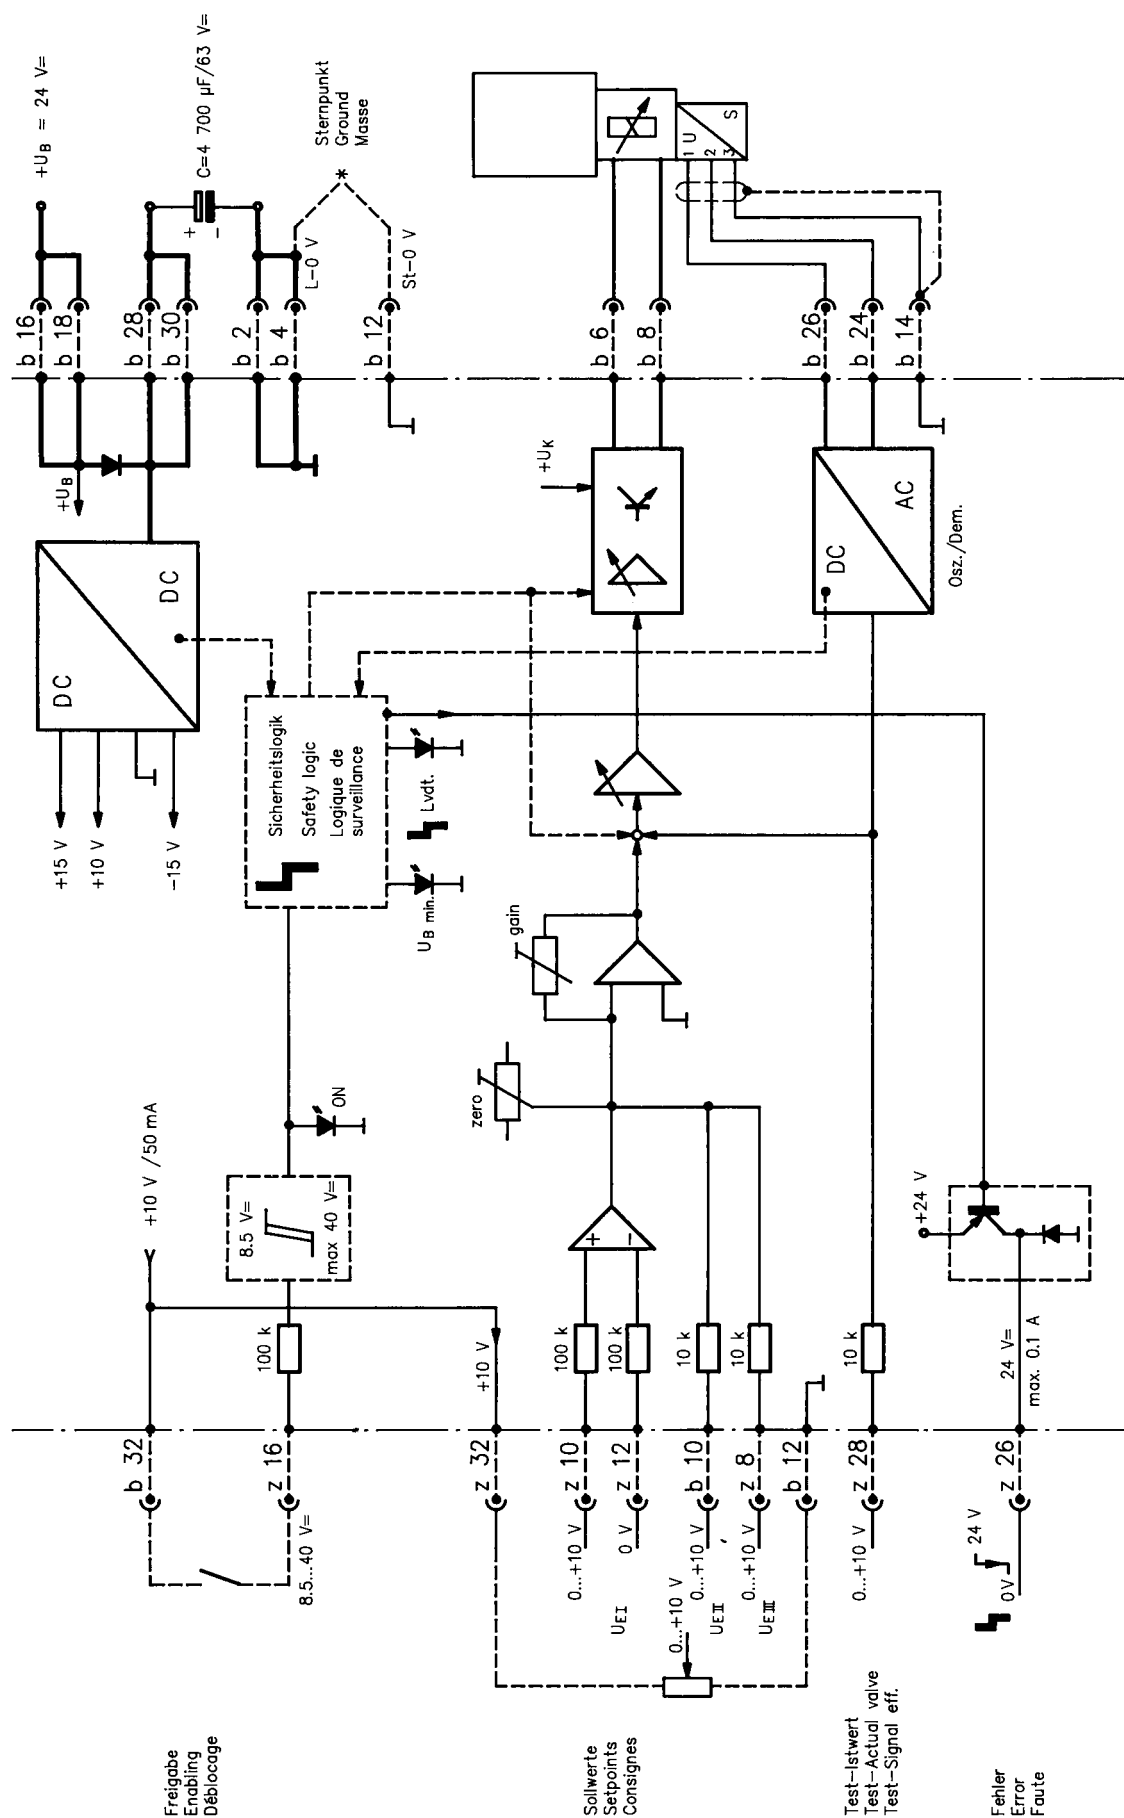

Valve with external trigger electronics (europe card with ramp, RE 30054)


Circuit diagram/pin assignment

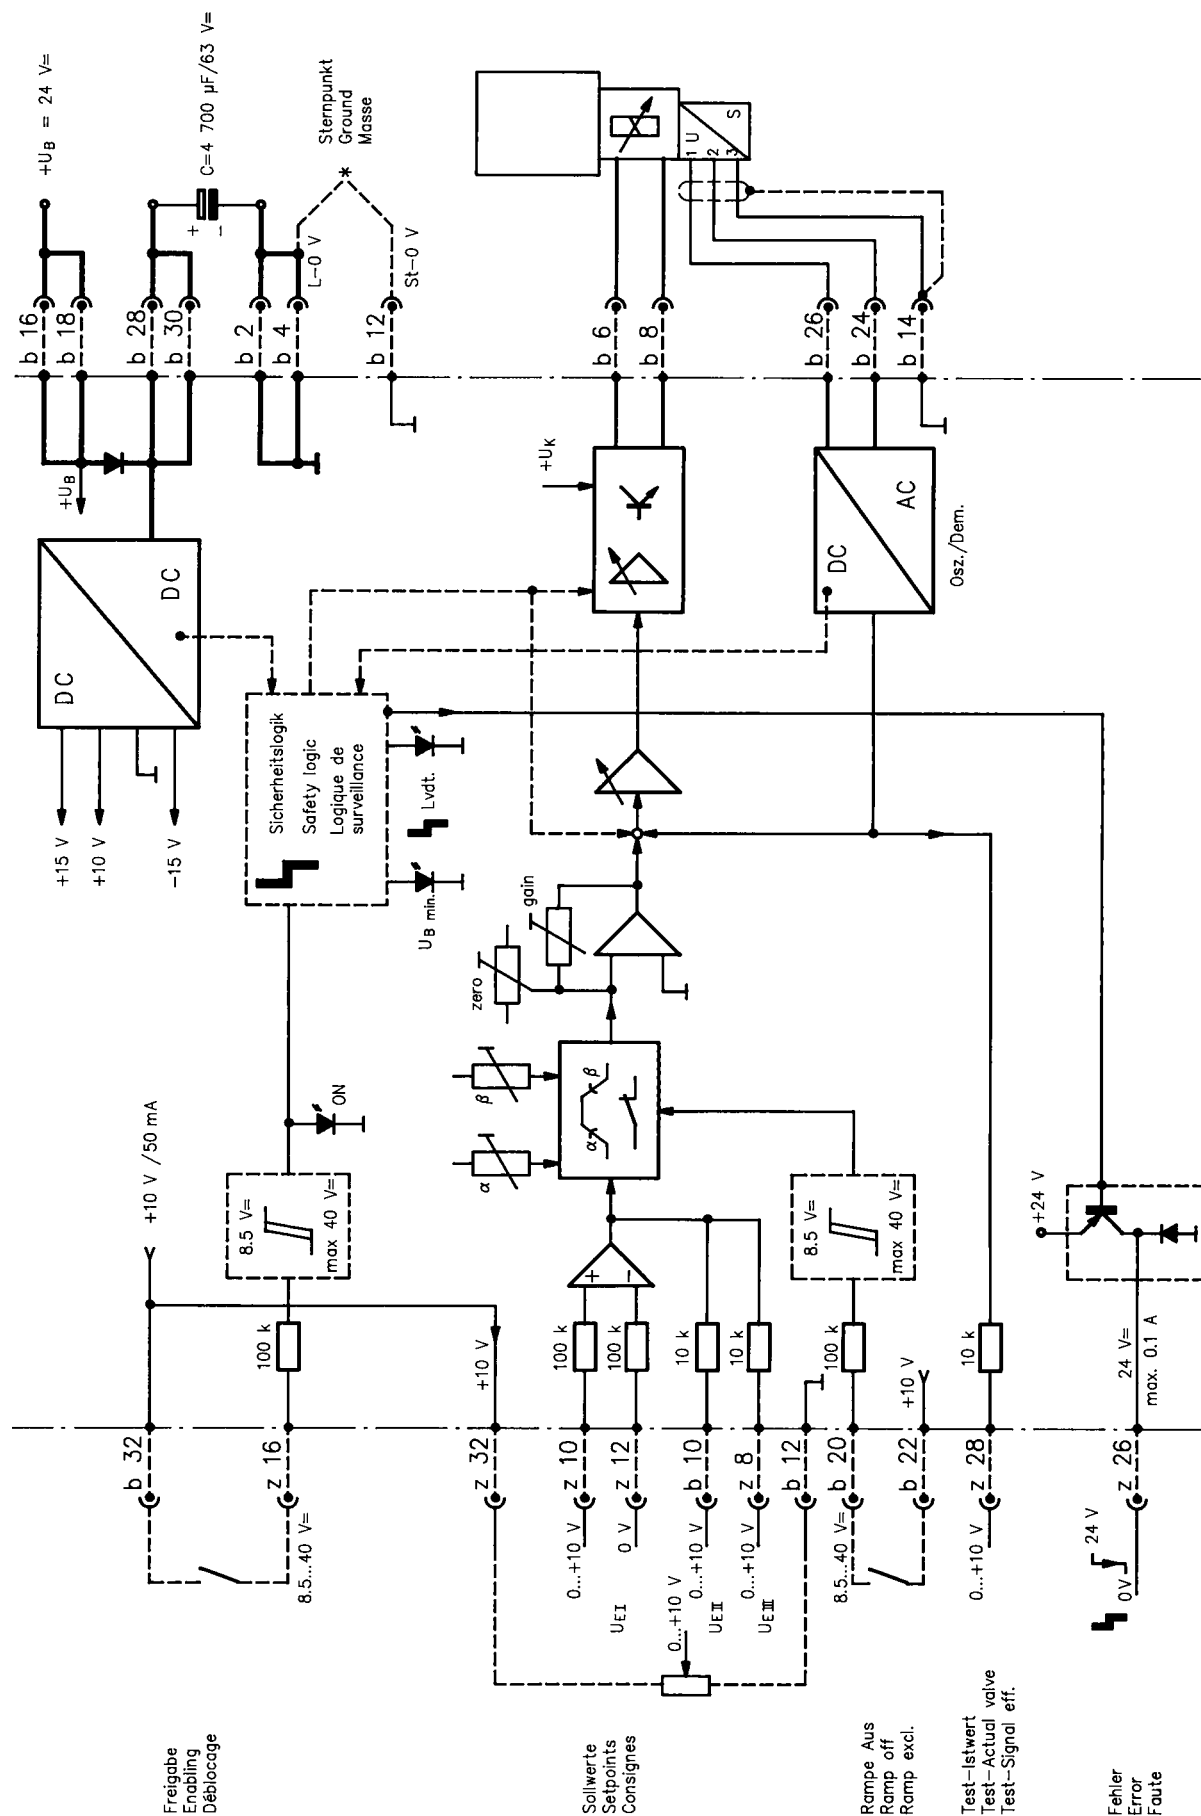

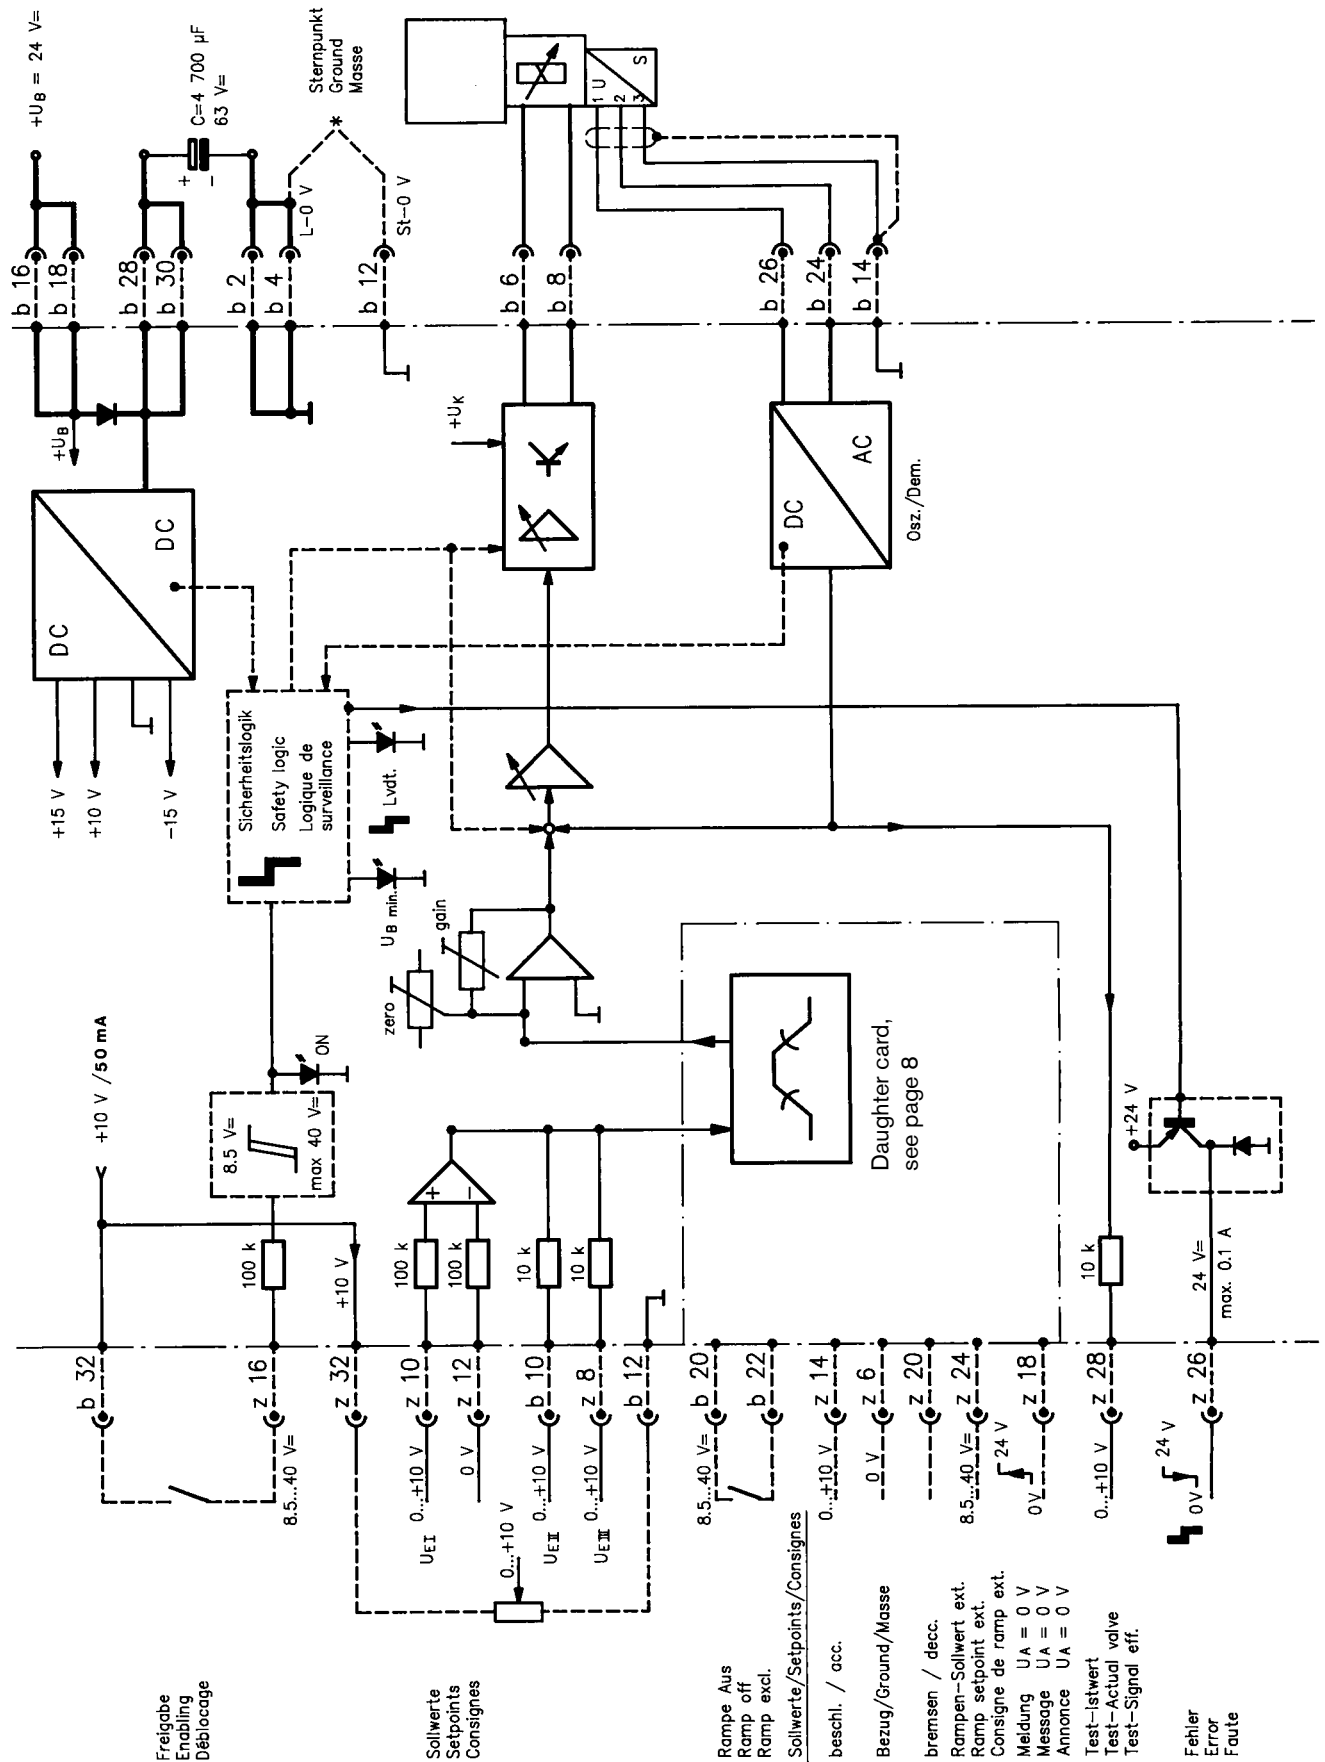


Courtesy of CMA/Flodyne/Hydradyne • Motion Control • Hydraulic • Pneumatic • Electrical • Mechanical • (800) 426-5480 • www.cmafh.com

Daughter card

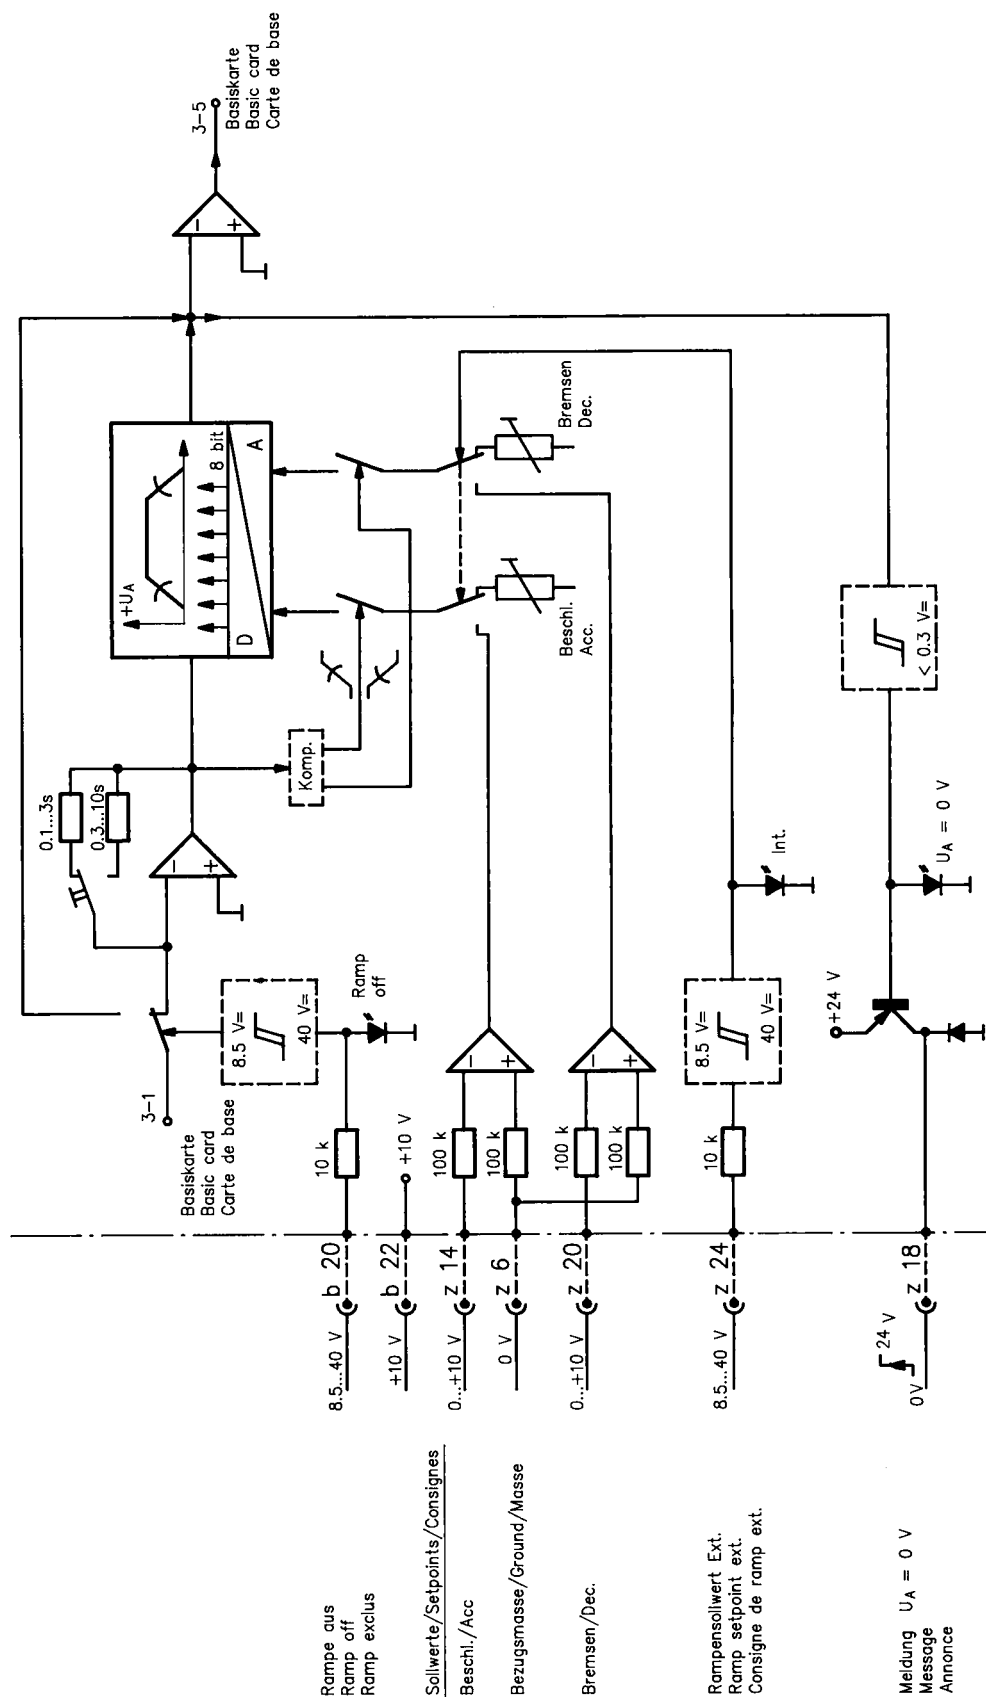

Characteristic curve (measured with HLP 46, $\vartheta_{oil} = 40^\circ\text{C} \pm 5^\circ\text{C}$)


Pressure in port P as a function of the setpoint
Nominal flow rate = 1 l/min

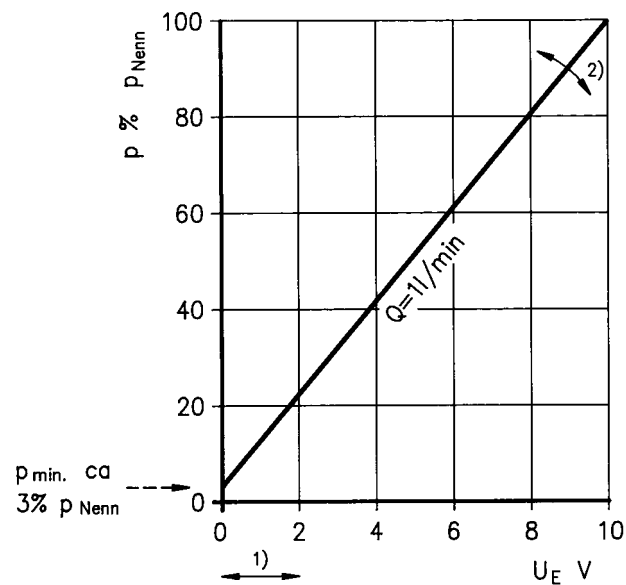

Valve amplifier


- 1) Zero adjustment
- 2) Sensitivity adjustment

Unit dimensions (nominal dimensions in mm)

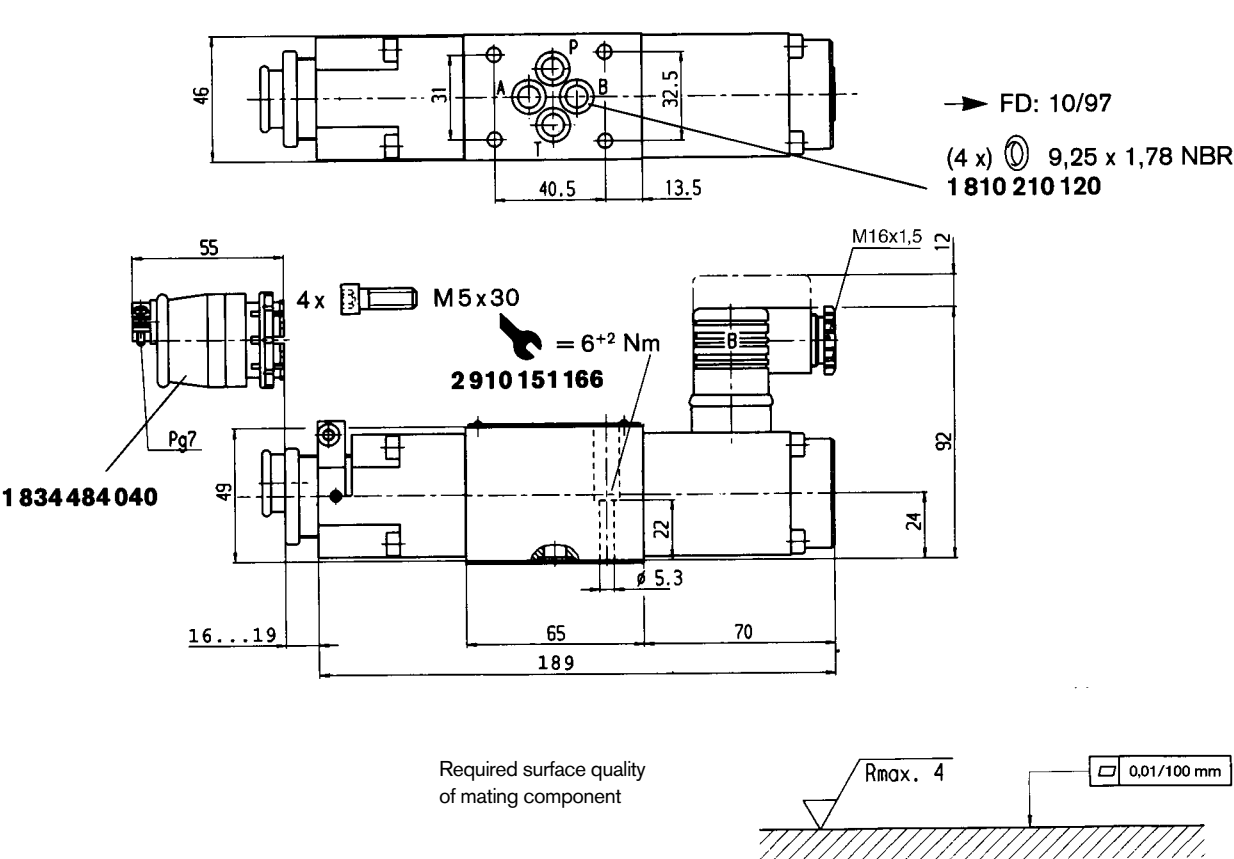

Mounting hole configuration: NG6 (ISO 4401-03-02-0-94)
For subplates, see catalog sheet RE 45053

- 1) Deviates from standard
- 2) Thread depth:
 - Ferrous metal 1.5 x Ø
 - Non-ferrous 2 x Ø



	P	A	T	B	F ₁	F ₂	F ₃	F ₄
⊗	21.5	12.5	21.5	30.2	0	40.5	40.5	0
⊙	25.9	15.5	5.1	15.5	0	-0.75	31.75	31
∅	8 ¹⁾	8 ¹⁾	8 ¹⁾	8 ¹⁾	M5 ²⁾	M5 ²⁾	M5 ²⁾	M5 ²⁾

Bosch Rexroth AG
Hydraulics
Zum Eisengießer 1
97816 Lohr am Main, Germany
Telefon +49 (0) 93 52 / 18-0
Telefax +49 (0) 93 52 / 18-23 58
documentation@boschrexroth.de
www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Notes

Bosch Rexroth AG
Hydraulics
Zum Eisengießer 1
97816 Lohr am Main, Germany
Telefon +49 (0) 93 52 / 18-0
Telefax +49 (0) 93 52 / 18-23 58
documentation@boschrexroth.de
www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Notes

Bosch Rexroth AG
Hydraulics
Zum Eisengießer 1
97816 Lohr am Main, Germany
Telefon +49 (0) 93 52 / 18-0
Telefax +49 (0) 93 52 / 18-23 58
documentation@boschrexroth.de
www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that our products are subject to a natural process of wear and aging.