



2025. 7. 14.

1 SP 18-11 N



EN 1.4401 (AISI 316)

9.2 kW MS6000

가

40 °C

MP204

Tempcon 가

(DOL)

가

-

-

가



-

-

-

(y )


(ppm) (x )

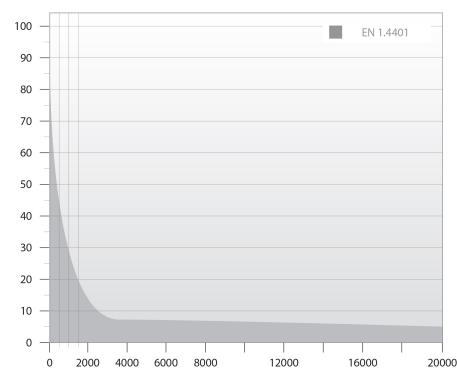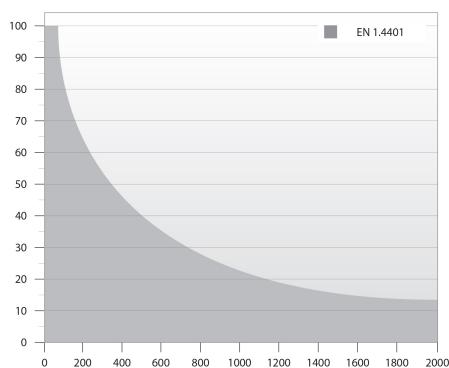




2025. 7. 14.

1

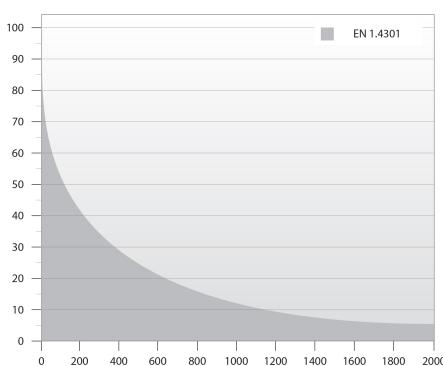

가  
/

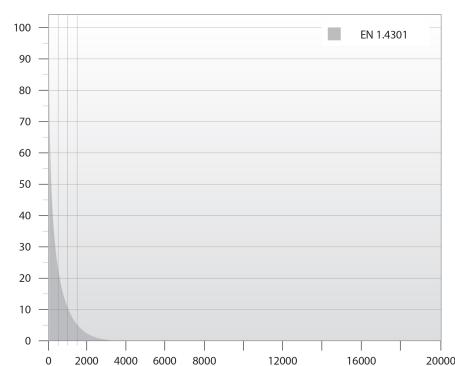

가  
NEMA

가

가

Sic/Sic

가

( )가

NTC-

Tempcon

가

MP204

MP204



0.15 m/sec

-15 .. 40 °C

: 40 °C

20 °C

: 998.2 kg/m³

: 3450 rpm

: 22 m³/h

: 117 m

: SIC/SICFKM

: CE, EAC, UKCA, SEPRA, MOROCCO

: ISO9906:2012 3B

: T40

: YES





2025. 7. 14.

1	:	
	:	Stainless steel
		EN 1.4401
	:	AISI 316
	:	Stainless steel
		EN 1.4401
	:	AISI 316
	:	
	:	DIN W.-Nr. 1.4539
		AISI 904L
	:	
	:	60 bar
	:	60 bar
	:	17.7 bar
	:	Rp
	:	2 1/2 inch
Motor diameter:	:	6 inch
	:	145 mm
	:	
	:	MS6000
	:	Grundfos
- P2:	:	9.2 kW
(P2):	:	9.2 kW
	:	60 Hz
	:	3 x 380-400 V
(Service factor):	:	1.15
	:	25.0 A
	:	410-430 %
cos phi -	:	0.82-0.78
	:	3470-3490 rpm
	:	
	:	(IEC 34-5): IP68
(IEC 85):	:	F
	:	
	:	5 m
	:	FLAT
	:	78335613
	:	Enamelled
	:	
	,	MEI :
	:	0.70
	:	64.8 kg
	:	90.6 kg
	:	0.2 m³
	:	WEEE

2025. 7. 14.





SP 18-11 N 60 Hz

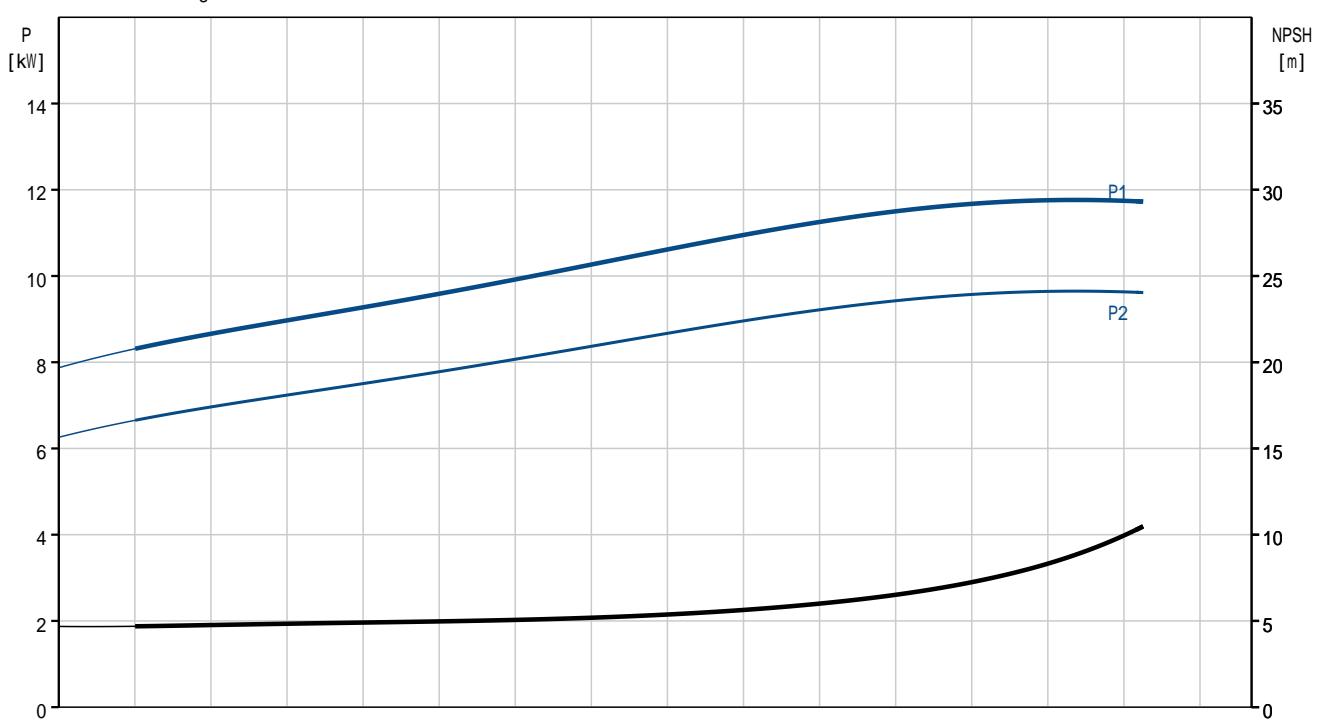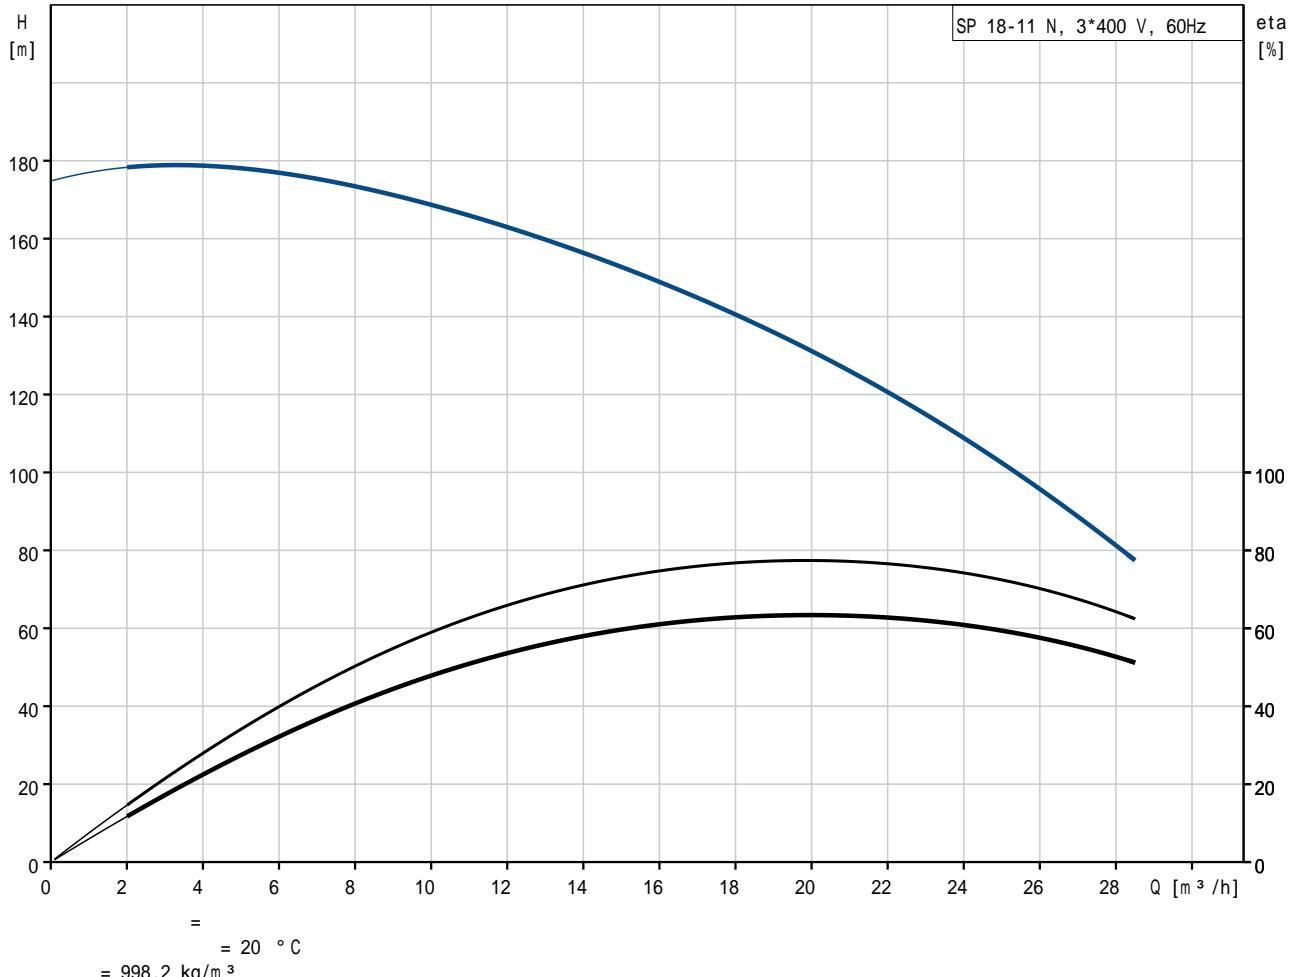



2025. 7. 14.

SP 18-11 N	
EAN	: 3450 rpm
	: 22 m³/h
	: 117 m
	: 11
	: NONE
	: SIC/SICFKM
	: CE, EAC, UKCA, SEP悠悠, MOROCCO
	: ISO9906:2012 3B
	: A
	: T40
	: YES
	: Stainless steel
	: EN 1.4401
	: AISI 316
	: Stainless steel
	: EN 1.4401
	: AISI 316
	: DIN W.-Nr. 1.4539
	: AISI 904L
	: 60 bar
	: 60 bar
	: 17.7 bar
	: Rp
	: 2 1/2 inch
Motor diameter:	: 6 inch
	: 145 mm
	: -15 .. 40 °C
0.15 m/sec	: 40 °C
	: 20 °C
	: 998.2 kg/m³
	: MS6000
	: Grundfos
- P2:	: 9.2 kW
(P2):	: 9.2 kW
	: 60 Hz
	: 3 x 380-400 V
(Service factor):	: 1.15
	: 25.0 A

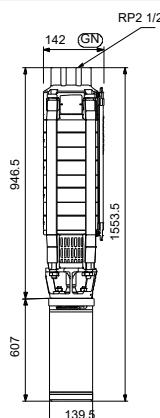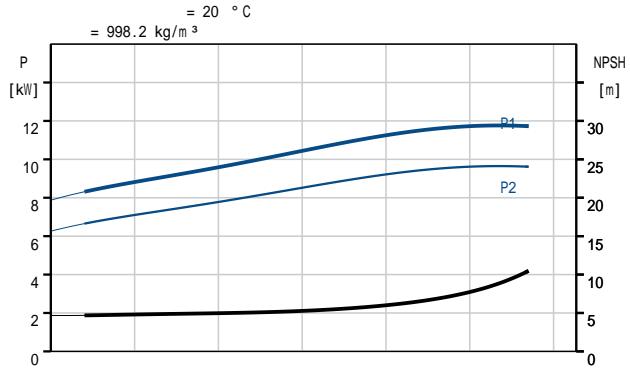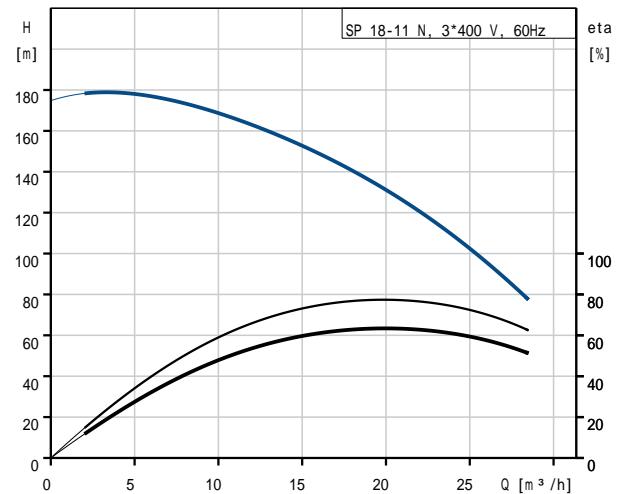

U1, W2	Brown
V1, U2	Black
W1, V2	Grey





: 2025. 7. 14.

:	410-430 %
cos phi - :	0.82-0.78
:	3470-3490 rpm
:	
(IEC 34-5):	IP68
(IEC 85):	F
:	
:	
:	5 m
:	FLAT
:	<a href="#">78335613</a>
Cable number:	96300112
:	Enamelled
:	
, MEI :	0.70
:	64.8 kg
:	90.6 kg
:	0.2 m <sup>3</sup>
:	WEEE


: 2025. 7. 14.

SP 18-11 N 60 Hz

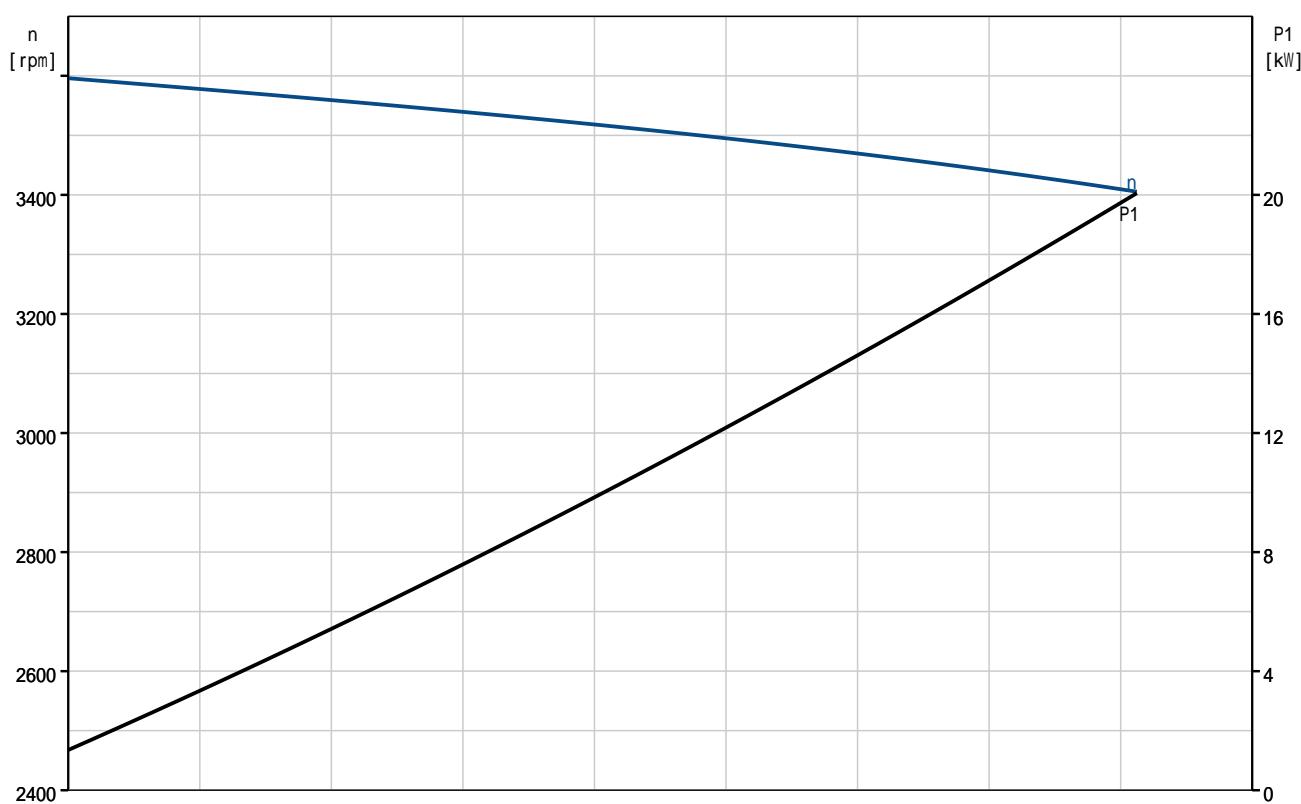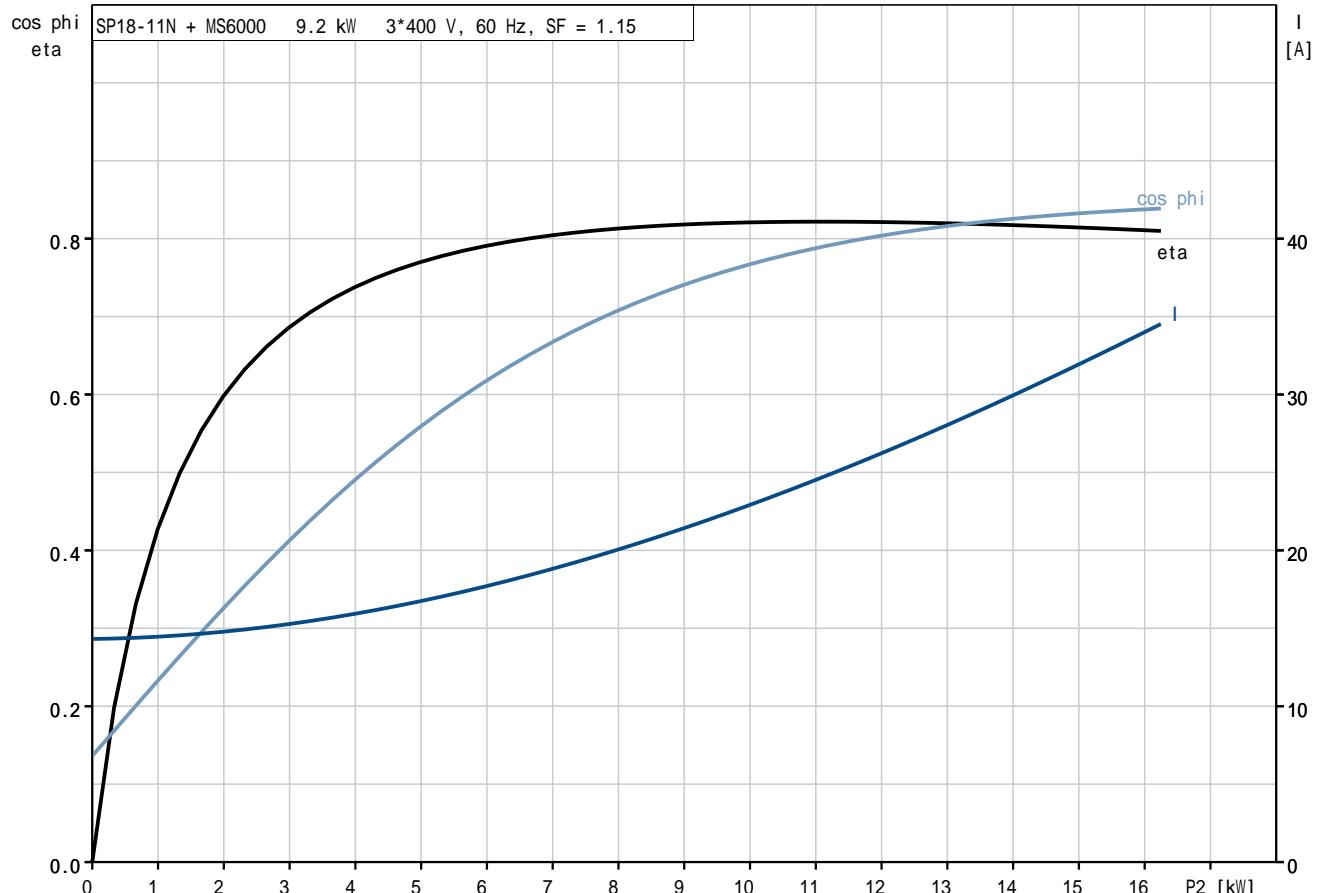


SP 18-11 N 60 Hz

RP2 1/2

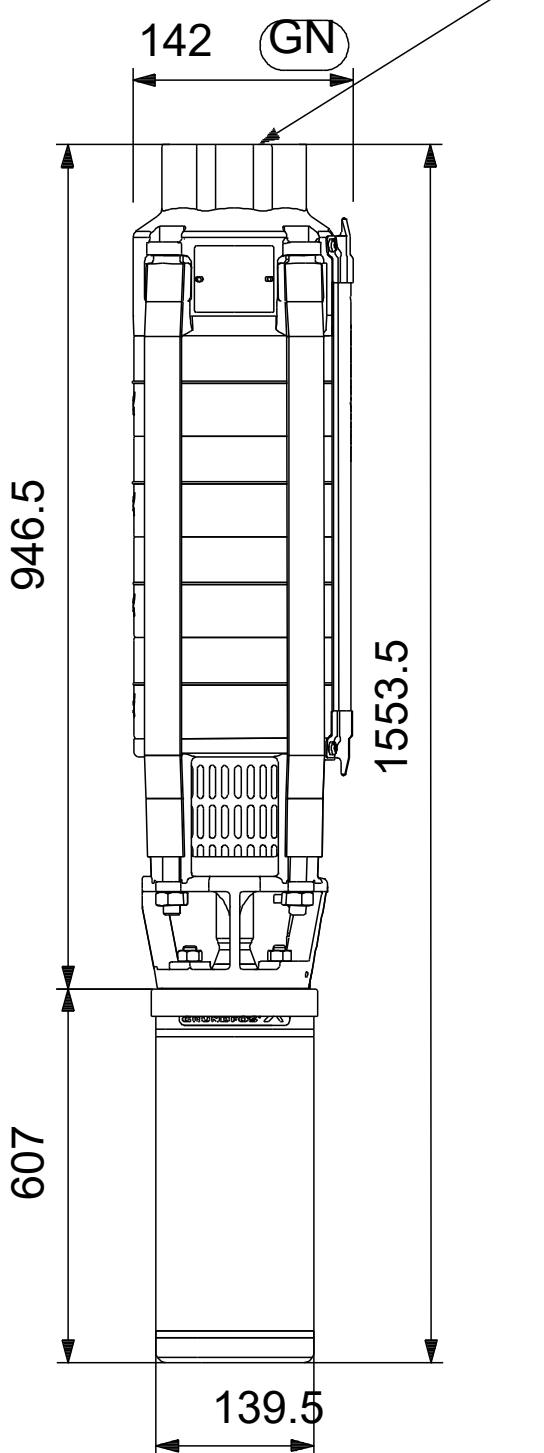

[mm]

SP 18-11 N 60 Hz

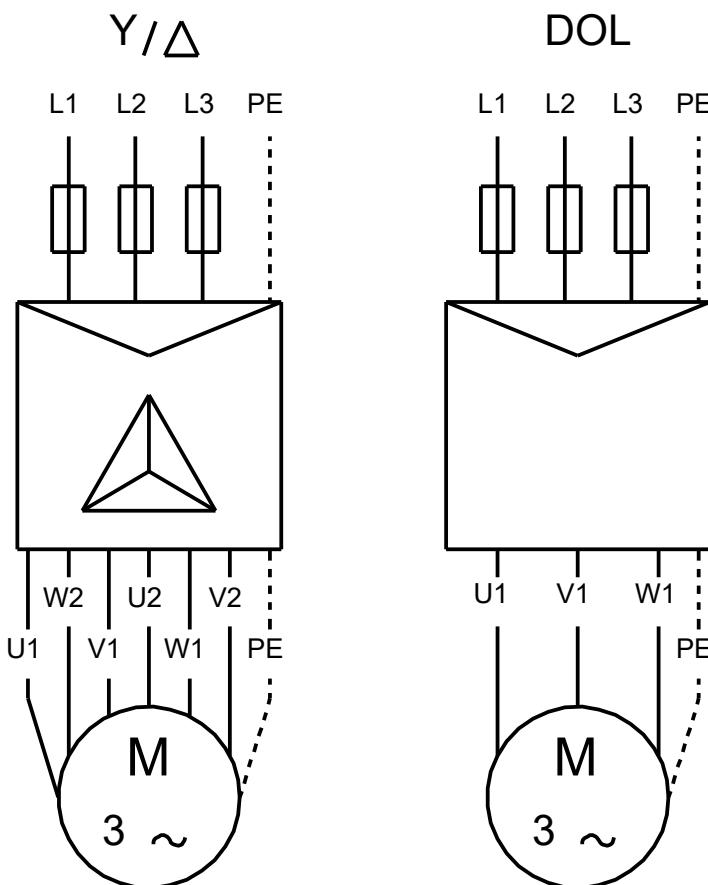

U1, W2	Brown
V1, U2	Black
W1, V2	Grey