



Specification

Manual(pdf/Korean)

Manual(pdf/Eng)

Twin Screw Compounding Extruder BA -19

L = 40, D = 19 Modular Intermeshing Co-rotating Twin Screw Extruder

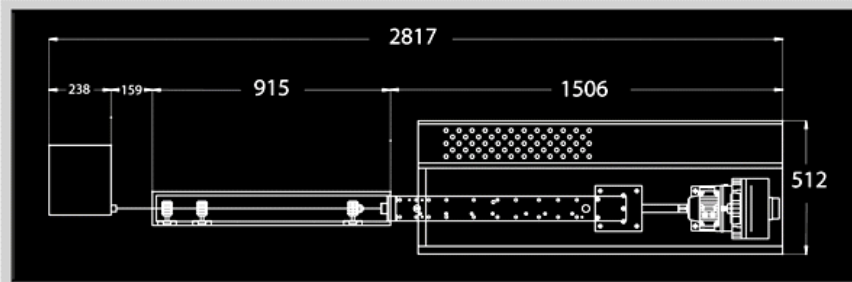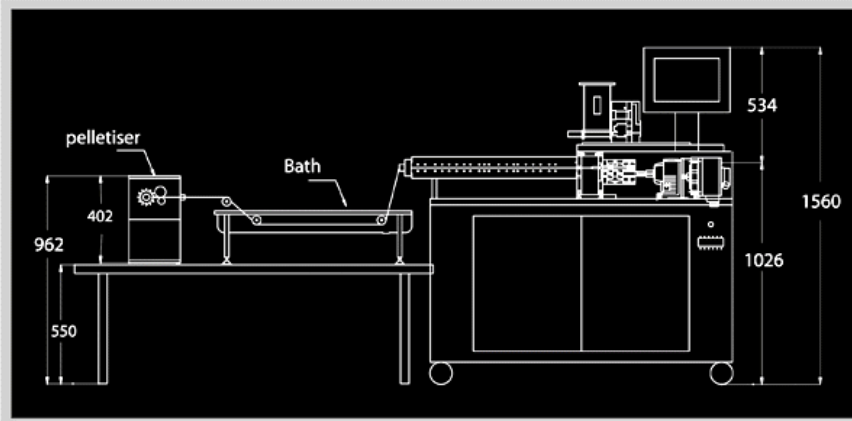

Barrel Diameter(mm) 19mm

Temperature Control Electrically Heated / Optionally Water Cooled

Motor Power(KW) 2.1(3HP), 2000rpm

Screw speed(rpm) 0-600

Barrel Length: Diameter L/D=40, Co-Rotating Intermeshing

Barrel Heating Power(KW) 4.0(die 0.2)

Length(mm) 1510

Width(mm) 500

Height(mm) 1560

Weight(kg) 270


Voltage/Power 220V, 1/3HP, 60Hz, 6.5KVA

Extrusion Pressure(Max) 100Bar(1500psi)

Maximum Operating Temperature 400 °C


Typical Output(kg/hr) 5-25

BA-19 screw - 다양한 형태의 Screw를 조합하여 여러 실험을 해낼 수 있습니다.

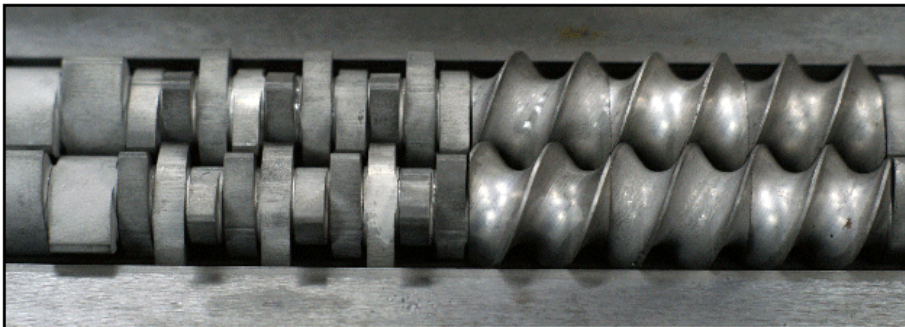


다양한 Screw를 조합한 바우테크의 제품

-BA-19 스크류 조합 screw element, combination

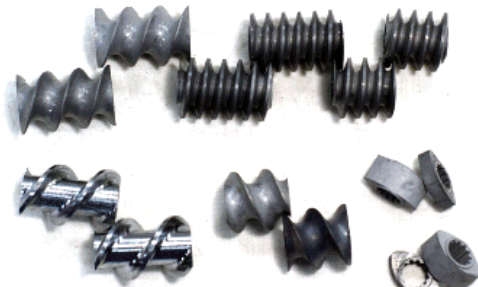

바우테크의 다양한 종류의 Screw Element

BA-19 Barrel structure

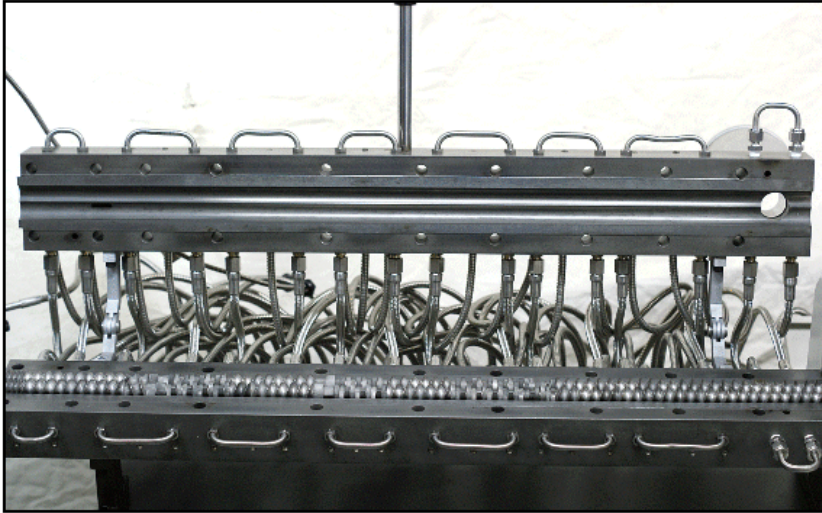

Clam Shell Type Barrel. 바렐을 위로 열면 Screw와 시료를 볼 수 있다.