


RU Series



RU-M1 Series Single Type

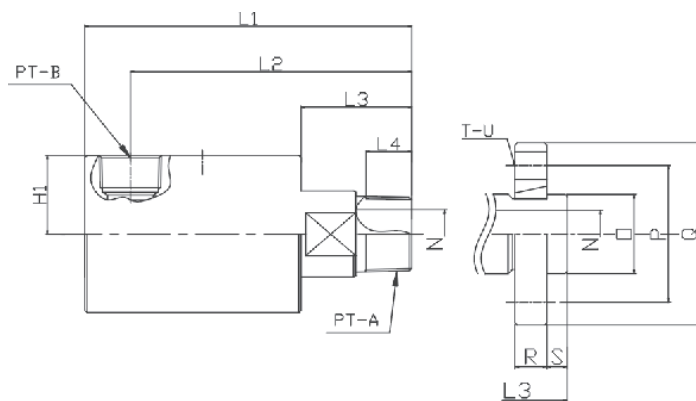

RU-M1 Series Single Type

TYPE	Thread R, L							
SIZE	PT-A	PT-B	L1	L2	L3	L4	N	H1
8A	8A(1/4")	8A(1/4")	84	73	24	10	7	22
10A	10A(3/8")	15A(1/2")	104	90	33	17	11	25
15A	15A(1/2")	15A(1/2")	112	97	36	16	12	27
20A	20A(3/4")	20A(3/4")	128	110	42	18	17	30
25A	25A(1")	25A(1")	143	124	48	20	22	34
32A	32A(1 1/4")	32A(1 1/4")	149	126	46	20	30	45
40A	40A(1 1/2")	40A(1 1/2")	157	134	47	20	38	50
50A	50A (2")	50A (2")	206	173	69	25	48	62

TYPE	FLANGE												
SIZE	PT-B	L1	L2	L3	L4	N	O	P	Q	T	U	R	S
15A	15A(1/2")	112	97	36	16	Ø12	Ø25	54	Ø74	4	Ø11	13	8
20A	20A(3/4")	128	110	42	18	Ø16	Ø30	54	Ø74	4	Ø11	13	8
25A	25A(1")	143	124	48	20	Ø22	Ø35	60	Ø80	4	Ø11	14	9
32A	32A(1 1/4")	149	126	46	20	Ø30	Ø45	75	Ø100	4	Ø11	16	10
40A	40A(1 1/2")	157	134	47	20	Ø35	Ø50	75	Ø100	4	Ø11	16	10
50A	50A(2")	206	173	69	25	Ø45	Ø65	95	Ø120	4	Ø14	18	12